



2026 CATALOG

SHENZHEN AURORA TECHNOLOGY LIMITED.

Leading Manufacturer in Automotive Lighting
Provide One-Stop Solutions & Service



Website: www.szaurora.com



Email: info@szaurora.com



Tel: +86 0755 82682990



Address: Aurora Technology Park, ShunSheng Road 9#, Pingdi Street,
Longgang District, Shenzhen, Guangdong, China

AURORA Company Profile



Shenzhen Aurora Technology Limited

Professional manufacturer with IATF16949, ISO9001, ISO14001, ISO45001 certificates.
Founded in 2011, with 35,000 square meters industrial park, more than 400 employees.
Specialized in LED lighting products, like LED offroad lights, LED headlight bulbs, ATV Lights, UTV Lights, Motorcycle lights, Marine LED lights, Industrial Lights, Mining Lights, Agriculture Lights, etc.



FACTORY VIDEO

We have strong R&D team and get below advantages

- 200+ innovation patents until now.
- Products got IP68 & IP69K, Emark, SAE, CE, RoHS etc.
- Advanced equipments like CNC machines, SMT lines and X-ray for high efficiency and good quality control.
- Professional equipments to support tests like Darkroom Beam Test, Lumen, Aging test, High & low temperature, Vibration, and UV test. Ensure high and reliable quality.



IATF16949



ISO9001



ISO14001



ISO45001



National High-tech Enterprise

SMT Production Line



CNC Production Line



Darkroom Beam Test



Production Line



Waterproof Test



High & Low Temperature test




Lumen Test




Vibration Test





Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
★ ALO-S5D1-6-H		6"	30W	Osram 5W	Combo	1.LED Chips: Osram 5W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10.Test and Certificate: CE, RoHS, UV,anti-vibration, anti-interference,salt spray,high and low temperature,falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Add \$1.2~\$2.3 get small connector or add \$6.9~\$9.2 get Standard wire harness 13. Amber Lens optional	66x31x31cm 14.6kg 21pcs per carton	Piece
★ ALO-S5D1-10-H		10"	50W	Osram 5W	Combo		41x38x39cm 14.6kg 16 pcs per carton	Piece
★ ALO-S5D1-20-H		20"	100W	Osram 5W	Combo		67x29x21cm 9.6kg 6pcs per carton	Piece
ALO-S5D1-26-H		26"	130W	Osram 5W	Combo			Piece
★ ALO-S5D1-30-H		30"	150W	Osram 5W	Combo		93x20x21cm 8.3kg 4pcs per carton	Piece
★ ALO-S5D1-40-H		40"	200W	Osram 5W	Combo		118x20x21cm 10.6kg 4pcs per carton	Piece
ALO-S5D1-46-H		46"	230W	Osram 5W	Combo			Piece
★ ALO-S5D1-50-H		50"	250W	Osram 5W	Combo		144x20x21cm 12.9kg 4pcs per carton	Piece
ALO-T-S5D1-6-H		6"	30W	Osram 5W	Combo		66x31x31cm 14.6kg 21 pcs per carton	Piece
ALO-T-S5D1-10-H		10"	50W	Osram 5W	Combo		41x38x39cm 14.6kg 16 pcs per carton	Piece
ALO-T-S5D1-20-H		20"	100W	Osram 5W	Combo		67x29x21cm 9.6kg 6 pcs per carton	Piece
ALO-T-S5D1-30-H		30"	150W	Osram 5W	Combo		93x20x21cm 8.3kg 4 pcs per carton	Piece
ALO-T-S5D1-40-H		40"	200W	Osram 5W	Combo		118x20x21cm 10.6kg 4 pcs per carton	Piece
ALO-T-S5D1-50-H		50"	250W	Osram 5W	Combo		144x20x21cm 12.9kg 4 pcs per carton	Piece

ALO-S5D1-10-P7E13-H		10"	50W	Osram 5W	Scene + Combo	 <table><tr><th rowspan="2">Size</th><th rowspan="2">LEDs QTY</th><th colspan="5">Size(mm)</th></tr><tr><th>A</th><th>B</th><th>C</th><th>D</th><th>E</th></tr><tr><td>6"</td><td>6</td><td>202</td><td>223.5</td><td>46</td><td>48.7</td><td>38.1</td></tr><tr><td>10"</td><td>10</td><td>303.6</td><td>325.1</td><td>46</td><td>48.7</td><td>38.1</td></tr><tr><td>20"</td><td>20</td><td>557.6</td><td>579.1</td><td>46</td><td>48.7</td><td>38.1</td></tr><tr><td>30"</td><td>30</td><td>811.6</td><td>833.1</td><td>46</td><td>48.7</td><td>38.1</td></tr><tr><td>40"</td><td>40</td><td>1065.6</td><td>1087.1</td><td>46</td><td>48.7</td><td>38.1</td></tr><tr><td>50"</td><td>50</td><td>1319.6</td><td>1338.1</td><td>46</td><td>48.7</td><td>38.1</td></tr></table>	Size	LEDs QTY	Size(mm)					A	B	C	D	E	6"	6	202	223.5	46	48.7	38.1	10"	10	303.6	325.1	46	48.7	38.1	20"	20	557.6	579.1	46	48.7	38.1	30"	30	811.6	833.1	46	48.7	38.1	40"	40	1065.6	1087.1	46	48.7	38.1	50"	50	1319.6	1338.1	46	48.7	38.1	41x38x39cm 14.6kg 16 pcs per carton	Piece
Size		LEDs QTY	Size(mm)																																																											
			A	B	C		D	E																																																						
6"		6	202	223.5	46		48.7	38.1																																																						
10"		10	303.6	325.1	46		48.7	38.1																																																						
20"	20	557.6	579.1	46	48.7	38.1																																																								
30"	30	811.6	833.1	46	48.7	38.1																																																								
40"	40	1065.6	1087.1	46	48.7	38.1																																																								
50"	50	1319.6	1338.1	46	48.7	38.1																																																								
ALO-S5D1-20-P7E13-H	20"	100W	Osram 5W	Scene + Combo	67x29x21cm 9.6kg 6 pcs per carton	Piece																																																								
ALO-S5D1-30-P7E13-H	30"	150W	Osram 5W	Scene + Combo	93x20x21cm 8.3kg 4 pcs per carton	Piece																																																								
ALO-S5D1-40-P7E13-H	40"	200W	Osram 5W	Scene + Combo	118x20x21cm 10.6kg 4 pcs per carton	Piece																																																								
ALO-S5D1-50-P7E13-H	50"	250W	Osram 5W	Scene + Combo	144x20x21cm 12.9kg 4 pcs per carton	Piece																																																								

Single Row Curved Light

ALO-C-S5D1-20-P7E7-H		20"	100W	Osram 5W	Combo	1.LED Chips: Osram 5W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS,UV,anti-vibration,anti-interference,salt spray,high and low temperature,falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Add \$1.2~\$2.3 get small connector or add \$6.9~\$9.2 get Standard wire harness	67x29x21cm 9.6kg 6 pcs per carton	Piece
ALO-C-S5D1-30-P7E7-H		30"	150W	Osram 5W	Combo		93x21x27cm 9.4kg 4 pcs per carton	Piece
ALO-C-S5D1-40-P7E7-H		40"	200W	Osram 5W	Combo		119x21x27cm 11kg 4 pcs per carton	Piece
ALO-C-S5D1-50-P7E7-H		50"	250W	Osram 5W	Combo		144x20x33 cm 12.9kg 4 pcs per carton	Piece

Ice-Melting Single Row Light

ALO-S5D1-10RH-W		10"	50W	Osram 5W	Driving Beam	1.LED Chips: Osram 5W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Driving Beam 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10.Test and Certificate: CE, RoHS, UV, anti-vibration,anti-interference,salt spray,high and low temperature,falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. There are 2 Versions to choose: 1) Wiring & Switch control. Add \$9.8~\$13.8 get wire 2) Wireless bluetooth and App control. Add \$6.9~\$9.2 to get wiring and \$11.9~\$18.9 for Bluetooth box. 13. Temperature sensor inside, with Ice-Melting Function	46x37x25cm 13.9kg 6 pcs per carton	Piece
ALO-S5D1-20RH-W		20"	100W	Osram 5W	Driving Beam		46x37x26cm 14.6kg 8 pcs per carton	Piece


RGB Light Series Single Row Light



Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit																																															
ALO-S5D1-6-R5Q		6"	30W	Osram 5W & RGB	Driving Beam	1.LED Chips: Osram 5W& RGB 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Driving Beam 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10.Test and Certificate: CE, RoHS, UV, anti-vibration,anti-interference,salt spray,high and low temperature,falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. There are 2 Versions to choose: 1) Wiring & Switch control. Add \$9.8~\$13.8 get wire 2) Wireless bluetooth and App control. Add \$6.9~\$9.2 to get wiring and \$11.9~\$18.9 for Bluetooth box.	46x37x25cm 11.6kg 8 pcs per carton	Piece																																															
ALO-S5D1-10-R5Q		10"	50W	Osram 5W & RGB	Driving Beam		46x37x26cm 14.6kg 8 pcs per carton	Piece																																															
ALO-S5D1-20-R5Q		20"	100W	Osram 5W & RGB	Driving Beam		63x33x22cm 14.5kg 6 pcs per carton	Piece																																															
ALO-S5D1-30-R4R5Q		30"	150W	Osram 5W & RGB	Driving Beam		89x24x25cm 12.6kg 4 pcs per carton	Piece																																															
ALO-S5D1-40-R4R5Q		40"	200W	Osram 5W & RGB	Driving Beam		113x24x25 16.2kg 4 pcs per carton	Piece																																															
ALO-S5D1-50-R4R5Q		50"	250W	Osram 5W & RGB	Driving Beam		140x24x25cm 19.8kg 4 pcs per carton	Piece																																															
ALO-S6D1-6-R5Q		6"	30W	Osram 5W & RGB	Driving Beam	Dimension <table><thead><tr><th rowspan="2">Size</th><th colspan="5">Size(mm)</th></tr><tr><th>A</th><th>B</th><th>C</th><th>D</th><th>E</th></tr></thead><tbody><tr><td>6"</td><td>201.8</td><td>222.3</td><td>35.2</td><td>67.4</td><td>32</td></tr><tr><td>10"</td><td>303.4</td><td>323.9</td><td>35.2</td><td>67.4</td><td>32</td></tr><tr><td>20"</td><td>557.4</td><td>577.9</td><td>35.2</td><td>67.4</td><td>32</td></tr><tr><td>30"</td><td>811.4</td><td>831.9</td><td>35.2</td><td>67.4</td><td>32</td></tr><tr><td>40"</td><td>1065.4</td><td>1085.9</td><td>35.2</td><td>67.4</td><td>32</td></tr><tr><td>50"</td><td>1319.4</td><td>1339.9</td><td>35.2</td><td>67.4</td><td>32</td></tr></tbody></table>	Size	Size(mm)					A	B	C	D	E	6"	201.8	222.3	35.2	67.4	32	10"	303.4	323.9	35.2	67.4	32	20"	557.4	577.9	35.2	67.4	32	30"	811.4	831.9	35.2	67.4	32	40"	1065.4	1085.9	35.2	67.4	32	50"	1319.4	1339.9	35.2	67.4	32	46x37x25cm 11.6kg 8 pcs per carton	Piece
Size		Size(mm)																																																					
		A	B	C	D		E																																																
6"		201.8	222.3	35.2	67.4		32																																																
10"		303.4	323.9	35.2	67.4		32																																																
20"		557.4	577.9	35.2	67.4		32																																																
30"	811.4	831.9	35.2	67.4	32																																																		
40"	1065.4	1085.9	35.2	67.4	32																																																		
50"	1319.4	1339.9	35.2	67.4	32																																																		
★ALO-S6D1-10-R5Q	10"	50W	Osram 5W & RGB	Driving Beam	46x37x26cm 14.6kg 8 pcs per carton	Piece																																																	
★ALO-S6D1-20-R5Q	20"	100W	Osram 5W & RGB	Driving Beam	63x33x22cm 14.5kg 6 pcs per carton	Piece																																																	
★ALO-S6D1-30-R4R5Q	30"	150W	Osram 5W & RGB	Driving Beam	89x24x25cm 12.6kg 4 pcs per carton	Piece																																																	
★ALO-S6D1-40-R4R5Q	40"	200W	Osram 5W & RGB	Driving Beam	113x24x25 16.2kg 4 pcs per carton	Piece																																																	
★ALO-S6D1-50-R4R5Q	50"	250W	Osram 5W & RGB	Driving Beam	140x24x25cm 19.8kg 4 pcs per carton	Piece																																																	

(White + Golden Yellow) Dual-Color Single Row Light



Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
ALO-S6-6-R5H1	 	6"	90W	3570	Combo	1.LED Chips: 3570 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K,3000K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Add \$2.3~\$4.6 get small connector or \$10.2~\$13 get Standard wire harness	46x37x25cm 11.6kg 8 pcs per carton	Piece
★ ALO-S6-10-R5H1		10"	150W	3570	Combo		46x37x26cm 14.6kg 8 pcs per carton	Piece
★ ALO-S6-20-R5H1		20"	300W	3570	Combo		63x33x22cm 14.5kg 6 pcs per carton	Piece
★ ALO-S6-30-R4R5H1		30"	450W	3570	Combo		89x24x25cm 12.6kg 4 pcs per carton	Piece
★ ALO-S6-40-R4R5H1		40"	600W	3570	Combo		113x24x25 16.2kg 4 pcs per carton	Piece
★ ALO-S6-50-R4R5H1		50"	750W	3570	Combo		140x24x25cm 19.8kg 4 pcs per carton	Piece

Dimension



Size	Size(mm)				
	A	B	C	D	E
6"	201.8	222.2	35.2	67.4	32
10"	303.4	323.9	35.2	67.4	32
20"	557.4	577.9	35.2	67.4	32
30"	811.4	831.9	35.2	67.4	32
40"	1065.4	1085.9	35.2	67.4	32
50"	1319.4	1339.9	35.2	67.4	32

(White + Golden Yellow) Dual-Color Single Row Light with DRL


ALO-S6-10-R5H1-W	 	10"	150W	3570	Combo + White DRL	1.LED Chips: 3570 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K,3000K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Add \$2.3~\$4.6 get small DT connector or \$10.2~\$13 get Standard wire harness 13. Amber DRL is optional	46x37x26cm 14.6kg 8 pcs per carton	Piece
ALO-S6-20-R5H1-W		20"	300W	3570	Combo + White DRL		63x33x22cm 14.5kg 6 pcs per carton	Piece
ALO-S6-30-R4R5H1-W		30"	450W	3570	Combo + White DRL		89x24x25cm 12.6kg 4 pcs per carton	Piece
ALO-S6-40-R4R5H1-W		40"	600W	3570	Combo + White DRL		113x24x25 16.2kg 4 pcs per carton	Piece
ALO-S6-50-R4R5H1-W		50"	750W	3570	Combo + White DRL		140x24x25cm 19.8kg 4 pcs per carton	Piece



Single Row Light with White/Amber Backlights



Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
★ ALO-P-S10-10-R13Y-AW		10"	90W	1860 & 2835	Combo + white/amber backlights	1.LED Chips: 1860 & 2835 2. Input Voltage : DC12-24V 3.Color Temperature: 6200K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Die-cast aluminum 9. Working Temperature: -40°C~145°C 10.Test and Certificate: CE, RoHS,UV,anti-vibration,anti-interference,salt spray,high and low temperature,falling ball impact etc. 11. Average Lifespan : 50,000 hours+ 12. Add \$2.3~\$4.6 get small connector or \$7.9~\$10.6 get Standard wire harness	41x38x32cm 14.8kg 8 pcs per carton	Piece
★ ALO-P-S10-20-R13Y-AW		20"	180W	1860 & 2835	Combo + white/amber backlights		67x29x30cm 16.7kg 6 pcs per carton	Piece
★ ALO-P-S10-30-R13Y-AW		30"	270W	1860 & 2835	Combo + white/amber backlights		93x20x30cm 15.1KG 4 pcs per carton	Piece
★ ALO-P-S10-40-R13Y-AW		40"	360W	1860 & 2835	Combo + white/amber backlights		118x20x33cm 18.7KG 4 pcs per carton	Piece
★ ALO-P-S10-50-R13Y-AW		50"	450W	1860 & 2835	Combo + white/amber backlights		144x20x33cm 22.4KG 4 pcs per carton	Piece

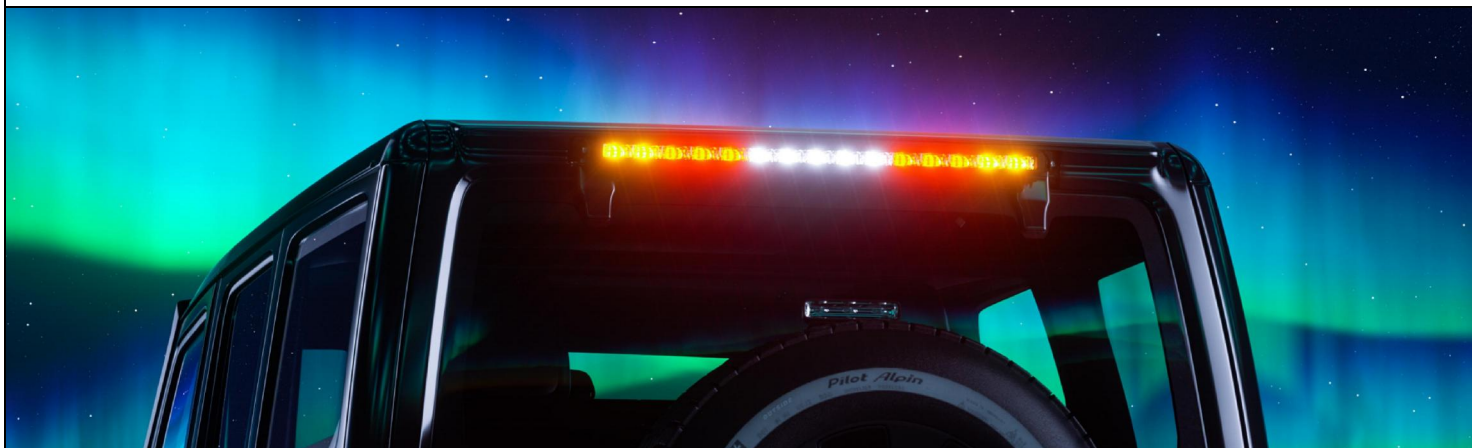



Size	A	B	C	D	E	F	G	H
10"	32mm	30mm	25mm	35mm	29mm	32mm	62.5mm	64mm
20"	58mm	55mm	50mm	65mm	52mm	57mm	62.5mm	64mm
30"	85mm	80mm	75mm	95mm	77mm	82mm	62.5mm	64mm
40"	108mm	105mm	100mm	125mm	102mm	107mm	62.5mm	64mm
50"	130mm	127mm	120mm	150mm	124mm	129mm	62.5mm	64mm

Sealed Beam Single Row Light with White/Amber Backlights

★ ALO-P-S13-10-R16Y-AW		10"	90W	1860 & 2835	Combo + white/amber backlights	1.LED Chips: 1860 & 2835 2. Input Voltage : DC12-24V 3.Color Temperature: 6200K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Die-cast aluminum 9. Working Temperature: -40°C~145°C 10.Test and Certificate: CE, RoHS,UV,anti-vibration,anti-interference,salt spray,high and low temperature,falling ball impact etc. 11. Average Lifespan : 50,000 hours+ 12. Add \$2.3~\$4.6 get small connector or \$7.9~\$10.6 get Standard wire harness	41x38x32cm 14.8kg 8 pcs per carton	Piece
★ ALO-P-S13-20-R16Y-AW		20"	180W	1860 & 2835	Combo + white/amber backlights		67x29x30cm 16.7kg 6 pcs per carton	Piece
★ ALO-P-S13-30-R16Y-AW		30"	270W	1860 & 2835	Combo + white/amber backlights		93x20x30cm 15.1KG 4 pcs per carton	Piece
★ ALO-P-S13-40-R16Y-AW		40"	360W	1860 & 2835	Combo + white/amber backlights		118x20x33cm 18.7KG 4 pcs per carton	Piece
★ ALO-P-S13-50-R16Y-AW		50"	450W	1860 & 2835	Combo + white/amber backlights		144x20x33cm 22.4KG 4 pcs per carton	Piece

Screwless Signal Warning Light




Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
ALO-S5D1-N24		24"	60W	Osram 5W	Scene	1.LED Chips: Osram 5W 2. Input Voltage : 9V-36V 3.Beam Pattern: Scene 4.Waterproof Rate: IP68 & IP69K 5. Housing Material: Aluminum 6063 6. Bracket: Anti-Rust Iron 7. Working Temperature: -40°C~145°C 8. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 9. Average Lifespan: 50,000 hours+ 10. Add \$4.6 get waterproof connector		Piece
ALO-S5D1-N30		30"	75W	Osram 5W	Scene		93x20x21cm 8.3kg 4 pcs per carton	Piece
ALO-S5D1-N40		40"	100W	Osram 5W	Scene		118x20x21cm 10.6kg 4 pcs per carton	Piece

Screwless Single Row Light with Lens Optics

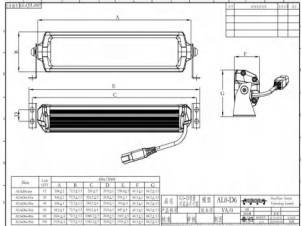
ALO-S5-5.5-L3D1		5.5"	30W	Osram 5W	Combo	1.LED Chips:Osram 5W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combination 5.Connector Type:Waterproof DT Connector 6.Waterproof Rate:IP68 & IP69K 7. Housing Material:Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10.Test and Certificate:CE, RoHS,UV,anti-vibration,anti-interference,salt spray,high and low temperature,falling ball impact etc. 11. Average Lifespan: 50,000 hours+ 12. Add \$1.2~\$2.3 get small connector or add \$6.9~\$9.2 get wire harness	66x31x31cm 14.6kg 21 pcs per carton	Piece
ALO-S5-11-L3D1		11"	60W	Osram 5W	Combo		41x38x39cm 14.6kg 16 pcs per carton	Piece
ALO-S5-22-L3D1		22"	120W	Osram 5W	Combo		67x29x21cm 9.6kg 6 pcs per carton	Piece

Heavy Duty Series Single Row Light

ALO-S1-6-D1D1		6"	45W	Osram 5W	Driving Beam	1.LED Chips:Osram 5W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Driving Beam 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Stainless steel 9. Working Temperature: -40°C~145°C 10.Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Add \$1.2~\$2.3 get small connector or add \$6.9~\$9.2 get Standard wire harness	54.5x29x29.5cm 9.1kg 8 pcs per carton	Piece
ALO-S1-10-D1D1		10"	75W	Osram 5W	Driving Beam		54.5x39x29.5cm 12.6kg 8 pcs per carton	Piece
ALO-S1-6-P7E7D1		6"	30W	Osram 5W	Combo		54.5x29x29.5cm 9.1kg 8 pcs per carton	Piece
ALO-S1-10-P7E7D1		10"	50W	Osram 5W	Combo		54.5x39x29.5cm 12.6kg 8 pcs per carton	Piece
ALO-S1-20-P7E7D1		20"	100W	Osram 5W	Combo		65x29x30.5cm 10.9kg 4 pcs per carton	Piece
ALO-S1-30-P7E7D1		30"	150W	Osram 5W	Combo		90.5x29x30.5cm 16.6kg 4 pcs per carton	Piece
ALO-S1-40-P7E7D1		40"	200W	Osram 5W	Combo		115x29x30.5cm 19.5kg 4 pcs per carton	Piece
ALO-S1-50-P7E7D1		50"	250W	Osram 5W	Combo		141x29x16.5cm 13kg 2 pcs per carton	Piece

Patented Screwless Series Dual Row Light





Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
★ ALO-D6D1-6		6"	60W	Osram 5W	Combo	1.LED Chips: Osram 5W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Add \$1.2~\$2.3 get small connector or add \$6.9~\$9.2 get Standard wire harness	46x37x26cm 17kg 10 pcs per carton	Piece
★ ALO-D6D1-10		10"	100W	Osram 5W	Combo		36.5x35x23cm 19kg 10 pcs per carton	Piece
★ ALO-D6D1-20		20"	200W	Osram 5W	Combo		63x35x26cm 11.8kg 6 pcs per carton	Piece
★ ALO-D6D1-30		30"	300W	Osram 5W	Combo		89x24x25cm 11.4kg 4 pcs per carton	Piece
★ ALO-D6D1-40		40"	400W	Osram 5W	Combo		114x24x25cm 15kg 4 pcs per carton	Piece
★ ALO-D6D1-50		50"	500W	Osram 5W	Combo		139x24x25cm 18kg 4 pcs per carton	Piece


Patented Screwless Series Dual Row Golden Yellow Light

ALO-T-D6D1-6		6"	60W	Osram 5W	Combo	1.LED Chips: Osram 5W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Add \$1.2~\$2.3 get small connector or add \$6.9~\$9.2 get Standard wire harness	46x37x26cm 17kg 10 pcs per carton	Piece
ALO-T-D6D1-10		10"	100W	Osram 5W	Combo		36.5x35x23cm 19kg 10 pcs per carton	Piece
ALO-T-D6D1-20		20"	200W	Osram 5W	Combo		63x35x26cm 11.8kg 6 pcs per carton	Piece
ALO-T-D6D1-30		30"	300W	Osram 5W	Combo		89x24x25cm 11.4kg 4 pcs per carton	Piece
ALO-T-D6D1-40		40"	400W	Osram 5W	Combo		114x24x25cm 15kg 4 pcs per carton	Piece
ALO-T-D6D1-50		50"	500W	Osram 5W	Combo		139x24x25cm 18kg 4 pcs per carton	Piece

Heavy Duty Series Dual Row Light

ALO-6-P4E4D1		6"	60W	Osram 5W	Combo	1.LED Chips:Osram 5W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Working Temperature: -40°C~145°C 9. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 10. Average Lifespan: 50,000 hours+	54.5x29x30cm 12.2kg 8 pcs per carton	Piece
ALO-10-P4E4D1		10"	100W	Osram 5W	Combo	11. Add \$1.2~\$2.3 get small connector or add \$6.9~\$9.2 get Standard wire harness	54.5x39x30cm 18.3kg 8 pcs per carton	Piece
ALO-20-P4E4D1		20"	200W	Osram 5W	Combo		65x29x30.5cm 13.5kg 4 pcs per carton	Piece
ALO-30-P4E4D1		30"	300W	Osram 5W	Combo		90.5x29x30.5cm 20kg 4 pcs per carton	Piece
ALO-40-P4E4D1		40"	400W	Osram 5W	Combo		115x29x30.5cm 24.4kg 4 pcs per carton	Piece
ALO-50-P4E4D1		50"	500W	Osram 5W	Combo		141x29x16.5cm 15.2kg 2 pcs per carton	Piece
ALO-D1-10-P4E4T		10"	200W	Osram 10W	Combo	1.LED Chips:Osram 10W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Stainless Steel 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+	54.5x39x30cm 18.3kg 8 pcs per carton	Piece
ALO-D1-20-P4E4T		20"	400W	Osram 10W	Combo	12. Add \$1.2~\$2.3 get small connector or add \$6.9~\$9.2 get Standard wire harness 	65x29x30.5cm 13.5kg 4 pcs per carton	Piece

Dual Row Curved Light


ALO-C-D6D1-20		20"	200W	Osram 5W	Combo	1.LED Chips:Osram 5W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Add \$1.2~\$2.3 get small connector or add \$6.9~\$9.2 get Standard wire harness	62x29x30cm 14kg 6 pcs per carton	Piece																																	
ALO-C-D6D1-30		30"	300W	Osram 5W	Combo		91x29x31cm 14.8kg 4 pcs per carton	Piece																																	
ALO-C-D6D1-40		40"	400W	Osram 5W	Combo		116x30x31cm 17.5kg 4 pcs per carton	Piece																																	
ALO-C-D6D1-50		50"	500W	Osram 5W	Combo	 <table border="1" data-bbox="962 2076 1219 2179"><thead><tr><th rowspan="2">Size</th><th rowspan="2">LED</th><th colspan="4">Size(mm)</th></tr><tr><th>L</th><th>D</th><th>H1</th><th>H2</th></tr></thead><tbody><tr><td>20"</td><td>40</td><td>562.2±3</td><td>50</td><td>75.8</td><td>48.1</td></tr><tr><td>30"</td><td>60</td><td>818.2±3</td><td>50</td><td>75.8</td><td>48.1</td></tr><tr><td>40"</td><td>80</td><td>1074.2±3</td><td>50</td><td>75.8</td><td>48.1</td></tr><tr><td>50"</td><td>100</td><td>1330.2±3</td><td>50</td><td>75.8</td><td>48.1</td></tr></tbody></table>	Size	LED	Size(mm)				L	D	H1	H2	20"	40	562.2±3	50	75.8	48.1	30"	60	818.2±3	50	75.8	48.1	40"	80	1074.2±3	50	75.8	48.1	50"	100	1330.2±3	50	75.8	48.1	141x29x17cm 11kg 2 pcs per carton
Size	LED	Size(mm)																																							
		L	D	H1	H2																																				
20"	40	562.2±3	50	75.8	48.1																																				
30"	60	818.2±3	50	75.8	48.1																																				
40"	80	1074.2±3	50	75.8	48.1																																				
50"	100	1330.2±3	50	75.8	48.1																																				

Scene Light Series Ultra Flood Dual Row Light



ALO-D6-10-E24D1		10"	100W	Osram 5W	Scene 120°	1.LED Chips: Osram 5W 2.Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Scene 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10.Test and Certificate: CE, RoHS,UV,anti-vibration,anti-interference,salt spray,high and low temperature,falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Add \$1.2 get small connector or add \$6.9 get Standard wire harness	36.5x35x23cm 19kg 10 pcs per carton	Piece
ALO-D6-20-E24D1		20"	200W	Osram 5W	Scene 120°		63x35x26cm 11.8kg 6 pcs per carton	Piece

(White + Golden Yellow) Dual-Color Dual Row Light



Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
ALO-D6-6-P23H1	     	6"	45W	3570	Spot	1.LED Chips: 3570 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K,3000k 4.Beam Pattern: Spot 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12.Add \$2.3~\$4.6 get small DT connector or \$10.2~\$13 get Standard wire harness	46x37x26cm 17kg 10 pcs per carton	Piece
ALO-D6-10-P23H1		10"	75W	3570	Spot		36.5x35x23cm 19kg 10 pcs per carton	Piece
ALO-D6-20-P23H1		20"	150W	3570	Spot		63x35x26cm 11.8kg 6 pcs per carton	Piece
ALO-D6-30-P23H1		30"	225W	3570	Spot		89x24x25cm 11.4kg 4 pcs per carton	Piece
ALO-D6-40-P23H1		40"	300W	3570	Spot		114x24x25cm 15kg 4 pcs per carton	Piece
ALO-D6-50-P23H1		50"	375W	3570	Spot		139x24x25cm 18kg 4 pcs per carton	Piece


(White + Golden Yellow) Dual-Color Dual Row Light with RGB Backlights

ALO-D6-10-P23H1-Q	    	10"	75W	3570	Spot	1.LED Chips: 3570 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K,3000k 4.Beam Pattern: Spot 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS,UV,anti-vibration, anti-interference,salt spray,high and low temperature,falling ball impact etc. 11. Average Lifespan: 50,000 hours+ 12.Wiring & Switch control: Add \$514.2~\$18.2 get wire Wireless bluetooth and App control. Add \$7.9~\$12.3 to get wiring and \$11.9~\$18.9 for Bluetooth box.	36.5x35x23cm 19kg 10 pcs per carton	Piece
ALO-D6-20-P23H1-Q		20"	150W	3570	Spot		63x35x26cm 11.8kg 6 pcs per carton	Piece
ALO-D6-30-P23H1-Q		30"	225W	3570	Spot		89x24x25cm 11.4kg 4 pcs per carton	Piece
ALO-D6-40-P23H1-Q		40"	300W	3570	Spot		114x24x25cm 15kg 4 pcs per carton	Piece
ALO-D6-50-P23H1-Q		50"	375W	3570	Spot		139x24x25cm 18kg 4 pcs per carton	Piece

Dual Row Light with White/Amber Backlights



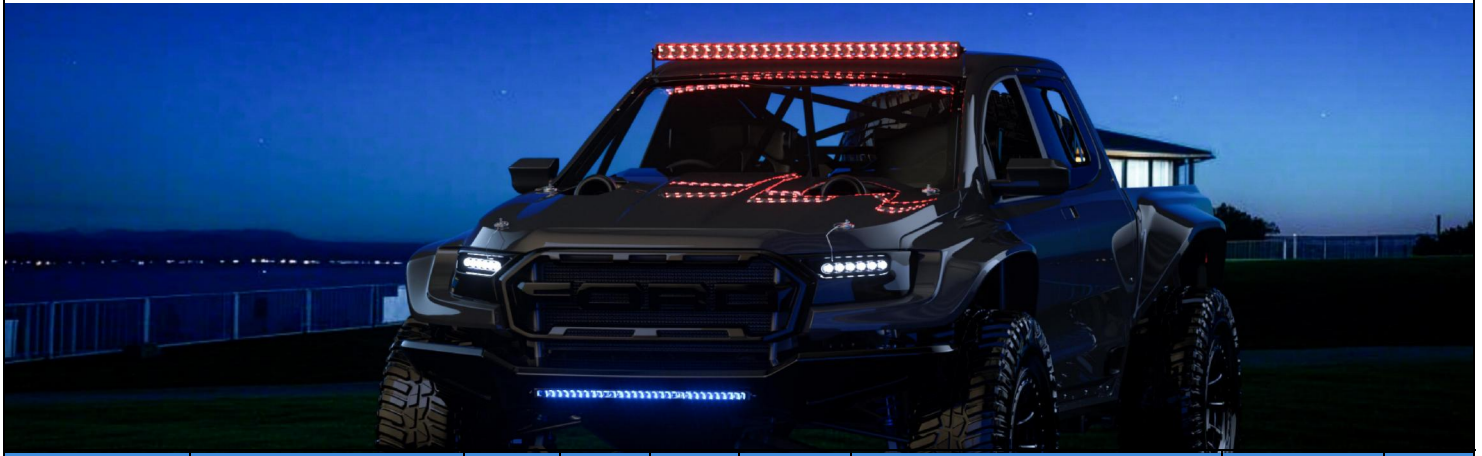
Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
★ALO-P-D10-10-R14Y-AW		10"	180W	1860 & 2835	Combo + white/amber backlits	1.LED Chips: 1860 & 2835 2. Input Voltage : DC12-24V 3.Color Temperature: 6200K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Die-cast aluminum 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan : 50,000 hours+ 12. Add \$2.3~\$4.6 get small connector or \$7.9~\$10.6 get Standard wire harness	74x38x29cm 15.9kg 6 pcs per carton	Piece
★ALO-P-D10-20-R14Y-AW		20"	360W	1860 & 2835	Combo + white/amber backlits			Piece
★ALO-P-D10-30-R14Y-AW		30"	540W	1860 & 2835	Combo + white/amber backlits		89x28x37cm 21.5kg 4 pcs per carton	Piece
★ALO-P-D10-40-R14Y-AW		40"	720W	1860 & 2835	Combo + white/amber backlits		144x28x36cm 25.8kg 4 pcs per carton	Piece
★ALO-P-D10-50-R14Y-AW		50"	900W	1860 & 2835	Combo + white/amber backlits			Piece



Sealed Beam Dual Row Light with White/Amber Backlights

★ALO-P-D13-10-R17Y-AW		10"	180W	1860 & 2835	Combo + white/amber backlits	1.LED Chips: 1860 & 2835 2. Input Voltage : DC12-24V 3.Color Temperature: 6200K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Die-cast aluminum 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan : 50,000 hours+ 12. Add \$2.3~\$4.6 get small connector or \$7.9~\$10.6 get Standard wire harness	74x38x29cm 15.9kg 6 pcs per carton	Piece
★ALO-P-D13-20-R17Y-AW		20"	360W	1860 & 2835	Combo + white/amber backlits			Piece
★ALO-P-D13-30-R17Y-AW		30"	540W	1860 & 2835	Combo + white/amber backlits		89x28x37cm 21.5kg 4 pcs per carton	Piece
★ALO-P-D13-40-R17Y-AW		40"	720W	1860 & 2835	Combo + white/amber backlits		144x28x36cm 25.8kg 4 pcs per carton	Piece
★ALO-P-D13-50-R17Y-AW		50"	900W	1860 & 2835	Combo + white/amber backlits			Piece

RGB Light Series Dual Row Light



Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
★ ALO-D6T-6-P23Q		6"	45W	Trinity White & RGB	Spot	1.LED Chips: Trinity White & RGB 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Spot 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. There are 2 Versions to choose: 1) Wiring & Switch control. Add \$8.9~\$12.5 get wire 2) Wireless bluetooth and App control. Add \$6.9~\$9.2 to get wiring and \$11.9~\$18.9 for Bluetooth box.	56x37x32cm 15.9kg 10 pcs per carton	Piece
★ ALO-D6T-10-P23Q		10"	75W	Trinity White & RGB	Spot		56x37x32cm 17.5kg 10 pcs per carton	Piece
★ ALO-D6T-20-P23Q		20"	150W	Trinity White & RGB	Spot		63x35x26cm 15.2kg 6 pcs per carton	Piece
★ ALO-D6T-30-P23Q		30"	225W	Trinity White & RGB	Spot		89x24x25cm 13kg 4 pcs per carton	Piece
★ ALO-D6T-40-P23Q		40"	300W	Trinity White & RGB	Spot		113x24x25cm 17kg 4 pcs per carton	Piece
★ ALO-D6T-50-P23Q		50"	375W	Trinity White & RGB	Spot		140x24x25cm 20.4kg 4 pcs per carton	Piece

Screwless Dual Row Light with Lens Optics

ALO-D6-6-L1L2D1		6"	60W	Osram 5W	Combo	1.LED Chips: Osram 5W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Add \$1.2~\$2.3 get small connector or add \$6.9~\$9.2 get Standard wire harness	46x37x26cm 17kg 10 pcs per carton	Piece
ALO-D6-10-L1L2D1		10"	100W	Osram 5W	Combo		36.5x35x23cm 19kg 10 pcs per carton	Piece

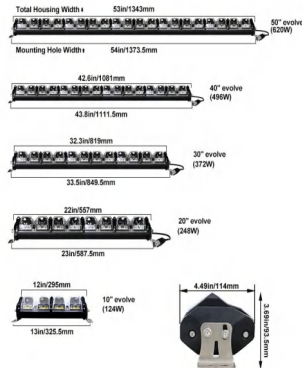
RGB Dual Row Light In-direct Reflector



Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
ALO-D8-10-R5Y1-Q		10"	150W	1860 & RGB	Driving Beam	1.LED Chips: Osram 5W & RGB 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Driving Beam 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE,RoHS,UV,anti-vibration, anti-interference,salt spray,high and low temperature, falling ball impact,etc. 11. Average Lifespan: 50,000 hours+ 12. Wiring & Switch control. Add \$8.9~\$12.5 get wire	36.5x35x23cm 19kg 10 pcs per carton	Piece
ALO-D8-20-R5Y1-Q		20"	300W	1860 & RGB	Driving Beam		63x35x26cm 11.8kg 6 pcs per carton	Piece
ALO-D8-30-R5Y1-Q		30"	450W	1860 & RGB	Driving Beam		89x24x25cm 11.4kg 4 pcs per carton	Piece
ALO-D8-40-R5Y1-Q		40"	600W	1860 & RGB	Driving Beam		114x24x25cm 15kg 4 pcs per carton	Piece
ALO-D8-50-R5Y1-Q		50"	750W	1860 & RGB	Driving Beam		139x24x25cm 18kg 4 pcs per carton	Piece

RGB Light Series Evolve Light Bar

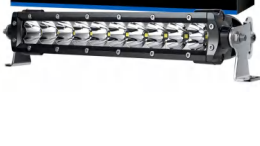


Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
★ ALO-N-10		10"	124W	Osram 5&10W	High/Low beam, Flood beam, Spot beam, Scene beam, RGB	1. LED Chips: Osram 5W & 10W 2. Input Voltage : 9V-36V 3. Color Temperature: 6500K & RGB 4. Connector Type: Waterproof DT Connector 5. Housing Material: Aluminum 6063 6. Bracket: Stainless Steel 7. Working Temperature: -40°C~145°C 8. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 10. Average Lifespan: 50,000 hours+ 11. Price include wire harness, bracket, control panel	43x35x46cm 14.8kg 4 pcs per carton	Piece
★ ALO-N-20		20"	248W	Osram 5&10W			67x38x39cm 21.3kg 4 pcs per carton	Piece
★ ALO-N-30		30"	372W	Osram 5&10W		Evolve Light Series Dimensions 	93x38x39cm 29.3kg 4 pcs per carton	Piece
★ ALO-N-40		40"	496W	Osram 5&10W			118x37x20cm 20kg 2 pcs per carton	Piece
★ ALO-N-50		50"	620W	Osram 5&10W			145x19x19cm 12.6kg 1 pcs per carton	Piece

Emark R149 Approved LED Lights

★ALO-S5D1-20-H-R149		20"	100W	Osram 5W	Combo	1.LED Chips: Osram 5W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Add \$1.2 get small connector or add \$6.9 get Standard wire harness	67x29x21cm 9.6kg 6 pcs per carton	Piece
★ALO-D6D1-20-R149		20"	200W	Osram 5W	Combo		63x35x26cm 11.8kg 6 pcs per carton	Piece

Emark R112 Approved LED Lights


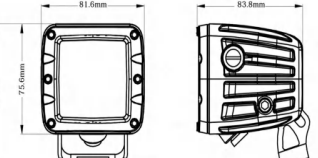
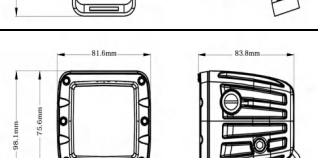
ALO-S1-10-P7B-E3		10"	30W	Osram 3W	Spot		54.5x39x29.5cm 12.6kg 8 pcs per carton	Piece
ALO-S1-20-P7B-E3		20"	60W	Osram 3W	Spot	1.LED Chips: Osram 3W/5W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Connector Type: Waterproof DT Connector 5.Waterproof Rate: IP68 & IP69K 6. Housing Material: Aluminum 6063 7. Working Temperature: -40°C~145°C 8. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 9. Average Lifespan: 50,000 hours+ 10. Add \$1.2get small connector or add \$6.9 get Standard wire harness	65x29x30.5cm 10.9kg 4 pcs per carton	Piece
ALO-10-P4E4D-E3		10"	100W	Osram 5W	Combo		54.5x39x30cm 18.3kg 8 pcs per carton	Piece
ALO-20-P4E4D-E3		20"	200W	Osram 5W	Combo		65x29x30.5cm 13.5kg 4 pcs per carton	Piece

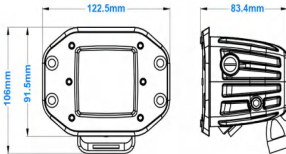
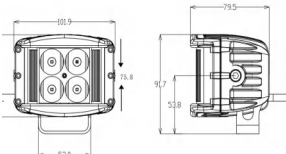
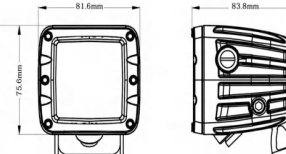
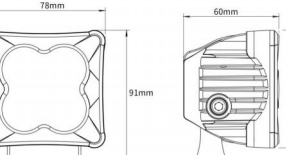
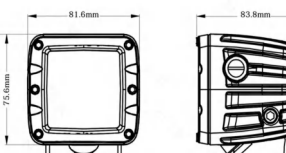
SAE Approved LED Lights

★ALO-D6D1-20-S		20"	200W	Osram 5W	Combo	1.LED Chips: 5W / 3W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Connector Type: Waterproof DT Connector 5.Waterproof Rate: IP68 & IP69K 6. Housing Material: Aluminum 6063 7. Working Temperature: -40°C~145°C 8. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 9. Average Lifespan: 50,000 hours+ 10. Add \$1.2 get small connector or add \$6.9 get Standard wire harness	63x35x26cm 11.8kg 6pcs per carton	Piece
ALO-20-P4E4K-S		20"	120W	Cree 3W	Combo		65x29x30.5cm 13.5kg 4 pcs per carton	Piece
ALO-L-6-P7E7B-S		7*5"	60W	Osram 3W	Combo		47x30x32 9.65KG 4 pcs per carton	Piece

W Series LED Work Light



Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
★ALO-2-P4T		3*3"	40W	Osram 10W	Spot	1.LED Chips: Osram 5W /10W 2.Voltage : 9V-36V 3.Color Temperature: 6500K 4.Connector Type: Waterproof DT Connector 5.Waterproof Rate: IP68 & IP69K 6. Housing Material: Aluminum 6063 7. Bracket: Anti-Rust Iron 8. Working Temperature: -40°C~145°C 9. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 10. Average Lifespan: 50,000 hours+ 11.Add \$1.2 get small connector or Standard wire harness option: For control 1 light: add \$5.8 For control 2 lights: add \$9.2 12. Golden lens and Amber lens is optional	69x30x16cm 11.3kg 10 pcs per carton	Piece
★ALO-2-E4T		3*3"	40W	Osram 10W	Flood		69x30x16cm 11.3kg 10 pcs per carton	Piece
★ALO-K-2-E4T		3*3"	40W	Osram 10W	Diffusion		69x30x16cm 11.3kg 10 pcs per carton	Piece
ALO-EK-2-E4T		3.6*2.7"	40W	Osram 10W	Diffusion		62x32x32cm 17.3kg 16 pcs per carton	Piece
ALO-2-D1D1		3*3"	30W	Osram 5W	Driving Beam		69x30x16cm 11.3kg 10 pcs per carton	Piece
ALO-2-P4D1		3*3"	20W	Osram 5W	Spot		69x30x16cm 11.3kg 10 pcs per carton	Piece
ALO-2-E4D1		3*3"	20W	Osram 5W	Flood		69x30x16cm 11.3kg 10 pcs per carton	Piece
ALO-T-2-P4D1 (Yellow Lens)		3*3"	20W	Osram 5W	Spot		69x30x16cm 11.3kg 10 pcs per carton	Piece

ALO-A-2-P4D1 (Amber Lens)		3*3"	20W	Osram 5W	Spot		69x30x16cm 11.3kg 10 pcs per carton	Piece
ALO-E-2-E4D1		3.6*2.7"	20W	Osram 5W	Flood		62x32x32cm 17.3kg 16 pcs per carton	Piece
★ ALO-2-P4E15D1		3*4"	40W	Osram 5W	Spot + Side Shooter		69x30x16cm 9.84kg 10 pcs per carton	Piece
★ ALO-2-E4E15D1		3*4"	40W	Osram 5W	Flood + Side Shooter			
ALO-2-P4A		3*3"	12W	CREE 3W amber	Spot		69x30x16cm 11.3kg 10 pcs per carton	Piece
ALO-2-E4A		3*3"	12W	CREE 3W amber	Flood			
★ ALO-D3-P4D1		3*3"	20W	Osram 5W	Spot		62x33x31cm 12.5KG 16 pcs per carton	Piece
★ ALO-D3-E4D1		3*3"	20W	Osram 5W	Flood			
★ ALO-D3-E4T		3*3"	40W	Osram 10W	Flood			
★ ALO-D3-P4T		3*3"	40W	Osram 10W	Spot			
ALO-2-E12T		3*3"	40W	Osram 10W	Scene 120°		69x30x16cm 11.3kg 10 pcs per carton	Piece
ALO-2-E12KR		3*3"	12W	3W White & Red LED	Scene 120°			Piece





Infrared LED Work Light

ALO-2-P4F-940		3*3"	12W	940nm Infrared led	Spot	1.LED Chips: 940nm Infrared led 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Spot/Flood 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE,RoHS,UV,anti-vibration,anti-interference,salt spray,high and low temperature,falling ball impact etc. 11. Average Lifespan: 50,000 hours+ 12.850nm Infrared LED is optional 13. Add \$1.2 get small connector or Standard wire harness option: For control 1 light: add \$5.8 For control 2 lights: add \$9.2 14.850nm Infrared LED chip is optional if need	69x30x16cm 11.3kg 10 pcs per carton	Piece
ALO-2-E4F-940		3*3"	12W	940nm Infrared led	Flood			

Small Working Light

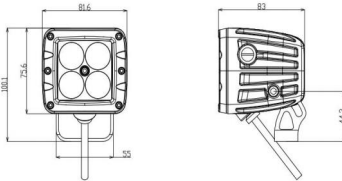


Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
ALO-L-2-P7T		3*1.5"	20W	Osram 10W	Spot	1.LED Chips: Osram LED 5W /10W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Connector Type: Waterproof DT Connector 5.Waterproof Rate: IP68 & IP69K 6. Housing Material: Aluminum 6063 7. Bracket: Stainless Steel 8. Working Temperature: -40°C~145°C 9. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 10. Average Lifespan: 50,000 hours+ 11.Add \$1.2 get small connector or Standard wire harness option: For control 1 light: add \$5.8 For control 2 lights: add \$9.2	59x40x35 17.7KG 45 pcs per carton	Piece
ALO-L-2-E7T		3*1.5"	20W	Osram 10W	Flood			
ALO-L-2-E7D1		3*1.5"	10W	Osram 5W	Flood			
★ALO-L-K-2-E7T		3*1.5"	20W	Osram 10W	Diffusion		59x40x35 17.7KG 45 pcs per carton	Piece
★ALO-E-L-K-2-E7T		3*1.5"	20W	Osram 10W	Diffusion		59x40x35 17.7KG 45 pcs per carton	Piece
★ALO-E-L-2-P7T		3*1.5"	20W	Osram 10W	Spot		59x40x35 17.7KG 45 pcs per carton	Piece
★ALO-E-L-2-E7T		3*1.5"	20W	Osram 10W	Flood		59x40x35 17.7KG 45 pcs per carton	Piece
ALO-L-2-E13T		3*1.5"	20W	10W	Scene		59x40x35 17.7Kg 45 pcs per carton	Piece
ALO-E-L-2-E13T		3*1.5"	20W	10W	Scene		59x40x35 17.7Kg 45 pcs per carton	Piece

ALO-L-4-E7D1		5*2"	20W	Osram 5W	Flood		53x53x35 20.2KG 36 pcs per carton	Piece
ALO-L-4-E13T		5*2"	40W	10W	Scene		53x53x35 20.2KG 36 pcs per carton	Piece
ALO-E-L-4-E13T		5*2"	40W	10W	Scene		53x53x35 20.2KG 36 pcs per carton	Piece
★ ALO-L-4.8-E31D1		4.8"*2.4"	15W	Osram 5W	Scene			Piece
★ ALO-W-4-C26T3		5*5"	90W	Osram 10W	Combo	1.LED Chips: Osram 10W 2. Input Voltage: 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combination/Diffusion 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Stainless steel 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12.Add \$1.2 get small connector or Standard wire harness option: For control 1 light: add \$5.8 For control 2 lights: add \$9.2	33*30*31cm 13.4KG 8 pcs per carton	Piece
★ ALO-W-4-C27T3		5*5"	120W	Osram 10W	Combo		33*30*31cm 13.4KG 8 pcs per carton	Piece
★ ALO-K-W-4-C26T3		5*5"	90W	Osram 10W	Diffusion		33*30*31cm 13.4KG 8 pcs per carton	Piece
★ ALO-K-W-4-C27T3		5*5"	120W	Osram 10W	Diffusion		33*30*31cm 13.4KG 8 pcs per carton	Piece
★ ALO-L-6-P7E7D1		7*5"	100W	Osram 5W	Combo	1.LED Chips: Osram 5W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Stainless steel 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12.Add \$1.2 get small DT connector or \$6.9 get Standard wire harness ; For control 2 lights: add \$10.6	47x30x32 9.65KG 4 pcs per carton	Piece

ALO-W1-2-P4T		3*3"	40W	Osram 10W	Spot	1.LED Chips: Osram 10W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Spot / Flood 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Stainless Steel 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Add \$1.2 get small connector or Standard wire harness option: For control 1 light: add \$5.8 For control 2 lights: add \$9.2	69x31x17cm 11.5kg 10 pcs per carton	Piece
ALO-W1-2-E4T		3*3"	40W	Osram 10W	Flood		69x31x17cm 11.5kg 10 pcs per carton	Piece

LED Working Light with Lens Optics

ALO-2-L1D1		3*3"	20W	Osram 5W	Spot+Lens	1.LED Chips: Osram 5W/10W 2.Voltage : 9V-36V 3.Color Temperature: 6500K 4.Connector Type: Waterproof DT Connector 5.Waterproof Rate: IP68 & IP69K 6. Housing Material: Aluminum 6063 7. Bracket: Anti-Rust Iron 8. Working Temperature: -40°C~145°C 9. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 10. Average Lifespan: 50,000 hours+ 11.Add \$1.2 get small connector or Standard wire harness option: For control 1 light: add \$5.8 For control 2 lights: add \$9.2	69x30x16 11.3kg 10 pcs per carton	Piece
ALO-2-L2D1		3*3"	20W	Osram 5W	Flood+Lens		69x30x16 11.3kg 10 pcs per carton	Piece
★ ALO-2-L22T3		3*3"	40W	Osram10W	Lens		69x30x16 11.3kg 10 pcs per carton	Piece

NEW Dual-Color Work Light (White+Golden Yellow)






Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
★ ALO-2-P23H1		3*3"	30W	3570	Spot	1.LED Chips: 3570 2.Voltage : 9V-36V 3.Color Temperature: 6500K, 3000K 4.Beam Pattern: Spot 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Working Temperature: -40°C~145°C 9. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 10. Average Lifespan: 50,000 hours+ 11. Add \$2.3 get small DT connector or Standard Wire harness option: For control 1 light add \$7.9 ; For control 2 lights add \$11.7 ALO-D3-2-P23H1-Q-APP : Price Include wiring harness for 2 lights; Bluetooth Box for control 2 lights: Add \$13.4	69x30x16 11.3kg 10 pcs per carton	Piece
ALO-D3-2-P23H1		3*3"	30W	3570	Spot		55x35x29 16KG 20 pcs per carton	Piece
ALO-D3-2-P23H1-Q-APP		3*3"	30W	3570 & RGB	Spot		55x35x29 12.1KG 12 pcs per carton	Piece

RGB Working Lights

Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
★ ALO-D3T-2-P23Q		3*3"	30W	3570 & RGB	Spot	1.LED Chips: 3570 & RGB 2. Input Voltage: 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Spot 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Working Temperature: -40°C~145°C 9. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 10. Average Lifespan: 50,000 hours+ 11. There are 2 Versions to choose: 1) Wiring & Switch control. For control 1 light: add \$9.8; For control 2 lights: add \$16 2) Wireless bluetooth and App control. Add \$6.9~\$9.2 to get wiring and \$11.9~\$18.9 for Bluetooth box.	55x35x29 12.1KG 12 pcs per carton	Piece
★ ALO-D3T-2-E23Q		3*3"	30W	3570 & RGB	Flood		55x35x29 12.1KG 12 pcs per carton	Piece
ALO-2-T-P23Q		3*3"	30W	3570 & RGB	Spot		55x35x29 16KG 12 pcs per carton	Piece

LED Work Light In-direct Reflector



Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
ALO-2-R9T3-AW-A	 	3*3"	40W	Osram 10W	White beam + Amber/White DRL	1.LED Chips: Osram 5W/10W 2.Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Driving Beam 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12.Add \$2.3 get small DT connector or Standard wire harness option: For control 2 lights: add \$11.7	69x30x16 11.3kg 10 pcs per carton	Piece
ALO-T-2-R9T3-AW-A	 	3*3"	40W	Osram 10W	Golden Yellow beam + White/Amber DRL	 	69x30x16 11.3kg 10 pcs per carton	Piece


Rear View Mirror light for UTV





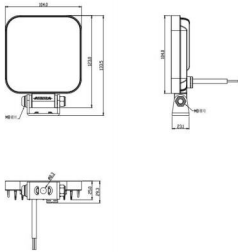
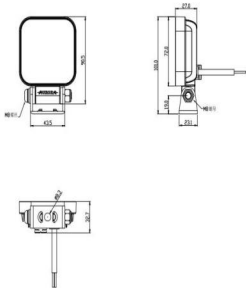
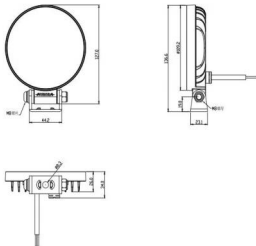
Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
ALO-W-4.5-E4T3		5.9"*2.3"	40W	Osram 10W	Flood	1.LED Chips: Osram 5W/10W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Spot / Flood 5.Waterproof Rate: IP68 & IP69K 6. Housing Material: Aluminum 6063 7. Working Temperature: -40°C~145°C 8. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature etc. 11. Average Lifespan: 50,000 hours+ 12. Add \$1.2 get small DT connector or Standard wire harness For control 2 lights: add \$10.7		Piece
ALO-W-4.5-P4T3		5.9"*2.3"	40W	Osram 10W	Spot			Piece

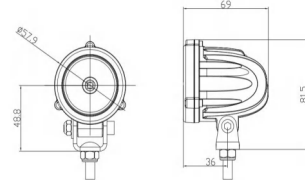
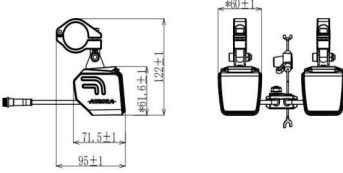
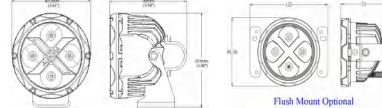
Industrial & Agricultural Work Lights



Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
ALO-W-4.2-L6D1-16		4.2"	48W	3W	65° Flood	Rated voltage: 12V / 24V Working voltage range: 10-30V DC Luminous flux≥2700LM Protection class: IP67/IP6K9K Certification: CE/RoHS/IP67 	/	Piece

ALO-W-4.2-L8D1-A		4.2"	27W	3W	Flood	Rated voltage: DC12V/DC 24V Working voltage range: DC9-30V Luminous flux: ≥2200 lm Beam Pattern: Flood Protection class: IP67 Vibration level: 10g/5-500Hz 30g/25-55HZ Product size:108*108mm Thickness:53mm Weight:368g 	/	Piece
ALO-W-4.2-L8D1		4.25"	27W	3W	Flood	Rated voltage: 12V / 24V Working voltage range: 9-32V DC Luminous flux≥ 6200LM/720LX Protection class: IP67 Certification: CE/RoHS/IP67 	/	Piece
ALO-W-4.29-L8D1		4.64"	27W	3W	Flood	Rated voltage: 12V / 24V Working voltage range: 10-30V DC Luminous flux≥5800LM Protection class: IP67/IP6K9K Certification: CE/RoHS/IP67 	/	Piece
ALO-R-3.34-L16D1-9		3.34"	14W	2835	Flood	Rated voltage: 12V / 24V Working voltage range: 9-32V DC Luminous flux≥6200LM/720LX Protection class: IP67 Certification: CE/RoHS/IP67 	/	Piece
ALO-R-4.5-L20K3-14		4.5"	15W	2835	Flood	Rated voltage: 12V / 24V Working voltage range: 9-32V DC Luminous flux≥6200LM/720LX Protection class: IP67 Certification: CE/RoHS/IP67 	/	Piece
ALO-R-4.5-L5T3		4.5"	27W	3W	Flood	Rated voltage: DC 12V/DC 24V Working voltage range:DC 9-30V Beam Pattern: Flood Protection class: IIP67 Vibration level: 10g/5-500Hz 30g/25-55HZ Product size:115*115mm Thickness:58mm Weight:345g 	/	Piece
ALO-R-4.5-L5D1		4.5"	27W	3W	Flood	Rated voltage: 12V / 24V Working voltage range: 9-32V DC Luminous flux≥6200LM/720LX Protection class: IP67 Certification: CE/RoHS/IP67 	/	Piece

★ALO-R-3-L32B2-5		3"	10W	3030	Flood	1.LED Chips: 2W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Waterproof Rate: IP68 5. Bracket: Anti-Rust Iron 6. Working Temperature: -40°C~145°C 7. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 8. Average Lifespan: 30,000 hours+ 9.Add \$1.2 get small connector		Piece
★ALO-W-3-L33B2-5		3"	10W	3030	Flood			Piece
★ALO-W-4-L31B1-13		4"	26W	3030	Flood			Piece
★ALO-W-4-L34B2-12-02		4"	24W	3030	Flood			Piece
★ALO-R-5-L30B1-14		5"	28W	3030	Flood			Piece

Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
2" / 4" LED Round Light								
★ALO-R-2-P6T		2"	10W	10W	Spot	1.LED Chips: Osram 5W/10W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Connector Type: Waterproof DT Connector 5.Waterproof Rate: IP68 & IP69K 7. Bracket: Anti-Rust Iron 8. Working Temperature: -40°C~145°C 9. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 10. Average Lifespan: 50,000 hours+ 11. Add \$1.2 get small DTconnector or Standard wire harness option: For control 1 light: add \$6.9; For control 2 lights: add \$9.6 ALO-R-2-L29: Price includes wiring harness.  	68x35x30cm 20kg 45 pcs per carton	Piece
★ALO-R-2-L26T-R149		2"	15W	1860	Emark R149 Approved		68x35x30cm 20kg 45 pcs per carton	Piece
★ALO-R-2-FOG-R149-02		2"	15W	1860	Emark R149 Approved		68x35x30cm 20kg 45 pcs per carton	Piece
★ALO-R-2-L29		2"	27W	7545	Emark R149 Approved		47x35x32cm 9kg 20 pcs per carton	Piece
ALO-R-4-C24D1		4"	30W	Osram 5W	Combo		68x29x28cm 13kg 20 pcs per carton	Piece
ALO-R-4-C24T3		4"	60W	Osram 10W	Combo			
4" LED Driving Light with RGB backlight								
Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
★ALO-R4T3-PQ		4"	40W	Osram 10W & RGB	Spot	1.LED Chips: Osram 10W+RGB 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Spot/Flood 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. 1) Wiring & Switch control. For control 1 light: add \$9.8; For control 2 lights: add \$16 2) Wireless bluetooth and App control. Add \$6.9~\$9.2 to get wiring and \$11.9~\$18.9 for Bluetooth box. Flush Mount Optional (Add \$2/pc) 	59x40x35cm 19.5kg 16 pcs per carton	Piece
★ALO-R4T3-EQ		4"	40W	Osram 10W & RGB	Flood		59x40x35cm 19.5kg 16 pcs per carton	Piece

4" Single Row Light / Linkable Light Bar









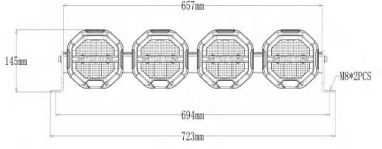


Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
★ ALO-P-L-4-P31T7-AW		4.7"*3.4"	40W	5050	Combo + white/amber backlights	1. LED Chips: 5050 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combo 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Working Temperature: -40°C~145°C 9. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 10. Average Lifespan: 50,000 hours+ ALO-P-L-4-P31T7-AW : Wire harness for control 2 lights: Add \$11.7 ALO-P-L-4-P31T7-AW-D2/D4/D6/D8/D10: with wiring harness included		Piece
ALO-P-L-4-P31T7-AW-D2		11.8"*3.4"	80W	5050	Combo + white/amber backlights			Kit
ALO-P-L-4-P31T7-AW-D4		23.3"*3.4"	160W	5050	Combo + white/amber backlights			Kit
ALO-P-L-4-P31T7-AW-D6		33.7"*3.4"	240W	5050	Combo + white/amber backlights		89x35x18cm 17.1 KG 3pcs per carton	Kit
ALO-P-L-4-P31T7-AW-D8		44.1"*3.4"	320W	5050	Combo + white/amber backlights		115x24x18cm 14.5 KG 3pcs per carton	Kit
★ ALO-P-L-4-P31T7-AW-D10		54.4"*3.4"	400W	5050	Combo + white/amber backlights		141x24x18cm 18.4 KG 2pcs per carton	Kit











4" 5" 6" 7" 9" LED Driving Light










Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
★ALO-W-4-R12T3-Q-APP (with RGB backlights)		4"*3.8"	40W	Osram 10W & RGB	Combo	1. LED Chips: Osram 5W/6W/10W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combo 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Working Temperature: -40°C~145°C 9. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 10. Average Lifespan: 50,000 hours+ 11. Add \$1.2-\$2.3 get small DT connector or \$6.9 get Standard wire harness; For control 2 lights: add \$10.6	59x40x35cm 22.4KG 16 pcs per carton	Piece
ALO-W-4-R12T3-Q-APP-D2		11.5"*3.8"	80W	Osram 10W & RGB	Combo	ALO-W-4-R12T3-Q-APP : Price Include wiring harness; Bluetooth Box for control 2 lights: Add \$13.4		Kit
ALO-W-4-R12T3-Q-APP-D4		21.6"*3.8"	160W	Osram 10W & RGB	Combo	ALO-W-4-R12T3-AW Wire harness for control 2 lights: Add \$11.7 ALO-W-4-R12T3-AW-D2/D4/D6/D8/D10: with wiring harness included ALO-W-4-R12T3-Q-APP-D2/D4/D6/D8/D10: with wiring harness & Bluetooth box included		Kit
ALO-W-4-R12T3-Q-APP-D6		31.7"*3.8"	200W	Osram 10W & RGB	Combo		92*36*21cm 14.3KG 2 pcs per carton	Kit
ALO-W-4-R12T3-Q-APP-D8		41.8"*3.8"	320W	Osram 10W & RGB	Combo		117*36*21cm 18.5KG 2 pcs per carton	Kit
ALO-W-4-R12T3-Q-APP-D10		51.9"*3.8"	400W	Osram 10W & RGB	Combo		144x19x19cm 11.5KG 1 pcs per carton	Kit

★ALO-W-4-R12T3-AW (with white/amber backlits)		4"*3.8"	40W	Osram 10W	Combo Emark R149 Approved	ALO-R5H-CW, ALO-R7H-CW, ALO-R-7-P7E7DH Standard wire harness option: For control 1 light: add \$11.8 For control 2 lights: add \$13.3 ALO-P-R-5-C39D1-AW Wire harness for control 2 lights: Add \$11.7 ALO-P-R-7-C34D1-AW, ALO-P-R-7-R15Y-AW ALO-P-R-9-C31D1-AW, ALO-P-R-9-R11Y-AW Standard wire harness option: For control 1 light: add \$7.9 For control 2 lights: add \$13.9	59x40x35cm 18.7KG 16 pcs per carton	Piece	
ALO-W-4-R12T3-AW-D2		11.5"*3.8"	80W	Osram 10W	Combo		59x40x35cm 23.1KG 8 pcs per carton	Kit	
ALO-W-4-R12T3-AW-D4		21.6"*3.8"	160W	Osram 10W	Combo		66x44x35cm 20.5KG 4pcs per carton	Kit	
ALO-W-4-R12T3-AW-D6		31.7"*3.8"	200W	Osram 10W	Combo			92x36x18cm 16.3 KG 2pcs per carton	Kit
ALO-W-4-R12T3-AW-D8		41.8"*3.8"	320W	Osram 10W	Combo			118x36x21cm 18.6KG 2 pcs per carton	Kit
ALO-W-4-R12T3-AW-D9		46.9"*3.8"	360W	Osram 10W	Combo		  		Kit
★ALO-W-4-R12T3-AW-D10		51.9"*3.8"	400W	Osram 10W	Combo			144x36x21cm 23KG 2 pcs per carton	Kit
★ALO-W-6-R19Y-Q-APP (with RGB backlits)		5.6"*5.8"	90W	1860 & RGB	Combo	ALO-W-6-R19Y-Q-APP : Price Include wiring harness; Bluetooth Box for control 2 lights: Add \$13.4 ALO-W-6-R19Y-AW: Wire harness for control 2 lights: Add \$11.7 ALO-W-6-R19Y-AW-D2/D4/D6/D7/D8: with wiring harness included		Piece	
ALO-W-6-R19Y-Q-APP-D2		12.9"*5.8"	180W	1860 & RGB	Combo	ALO-W-6-R19Y-Q-APP-D2/D4/D6/D7/D8: with wiring harness & Bluetooth box included		Kit	

ALO-W-6-R19Y-Q-APP-D4		25.8"*5.8"	360W	1860 & RGB	Combo			Kit
ALO-W-6-R19Y-AW-D6		38.9"*5.8"	540W	1860 & RGB	Combo			Kit
ALO-W-6-R19Y-Q-APP-D7		45.4"*5.8"	630W	1860 & RGB	Combo			Kit
ALO-W-6-R19Y-Q-APP-D8		51.9"*5.9"	720W	1860 & RGB	Combo			Kit
★ALO-W-6-R19Y-AW		5.6"*5.8"	90W	1860	Combo E-mark R149 Approved			Piece
ALO-W-6-R19Y-AW-D2		12.9"*5.8"	180W	1860	Combo			Kit
ALO-W-6-R19Y-AW-D4		25.8"*5.8"	360W	1860	Combo			Kit
ALO-W-6-R19Y-AW-D6		38.9"*5.8"	540W	1860	Combo			Kit
ALO-W-6-R19Y-AW-D7		45.4"*5.8"	630W	1860	Combo			Kit

ALO-W-6-R19Y-AW-D8		51.9"*5.9"	720W	1860	Combo			Kit
★ALO-P-R-5-C39D1-AW		5"*5.3"	60W	Osram 5W	Combo Emark R149 Approved			Piece
ALO-P-R-5-C39D1-AW-D2		12.9"*5.3"	120W	Osram 5W	Combo			Kit
ALO-P-R-5-C39D1-AW-D4		25.9"*5.3"	240W	Osram 5W	Combo			Kit
ALO-P-R-5-C39D1-AW-D6		38.9"*5.3"	360W	Osram 5W	Combo			Kit
★ALO-P-R-5-C39D1-AW-D7		45.4"*5.3"	420W	Osram 5W	Combo			Kit
★ALO-P-R-5-C39D1-AW-D8		51.8"*5.3"	480W	Osram 5W	Combo			Kit
ALO-R-5-C10D1		7"	105W	Osram 5W	Combo		62x35x28cm 13.6kg 4 pcs per carton	Piece
★ALO-R5H-CW (with white background light, high lux design)		7"	144W	Osram 6W	Combo		52x36x33 cm 11.5 kg 4 pcs per carton	Piece
★ALO-P-R-7-C34D1-AW (with white/amber backlights)		7"	120W	Osram 5W	Combo		49x31x14 cm 6.5 kg 2 pcs per carton	Piece


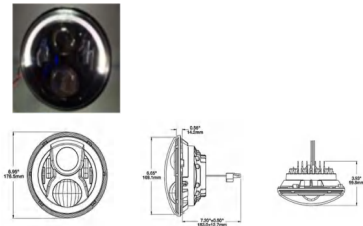

★ALO-P-R-7-R15Y-AW		7"	270W	Osram 5W +1860	Combo		48x34x14 cm 6 kg 2 pcs per carton	Piece
ALO-DR7		9"	180W	Osram 5W	Combo		55x30x27cm 12kg 4 pcs per carton	Piece
ALO-R-7-P7E7DH (with background light)		9"	160W	Osram 5W	Combo		62x41x34cm 16.4kg 4 pcs per carton	Piece
★ALO-R7H-CW (with white background light, high lux design)		9"	198W	Osram 6W	Combo		62x41x34cm 14kg 4 pcs per carton	Piece
★ALO-GR7-R (with side shooter)		9"	205W	Osram 5W	Combo + Side Shooter E-mark R112 Approved		55x31x29cm 12.8kg 4 pcs per carton	Piece
★ALO-GR7-B (with side shooter)		9"	205W	Osram 5W	Combo + Side Shooter E-mark R112 Approved		55x31x29cm 12.8kg 4 pcs per carton	Piece
★ALO-P-R-9-C31D1-AW (with white/amber backlits)		9"	150W	Osram 5W	Combo		59x40x29cm 15.1kg 4 pcs per carton	Piece
★ALO-P-R-9-R11Y-AW (with white/amber backlits)		9"	270W	Osram 5W +1860	Combo		59x40x29cm 15.1kg 4 pcs per carton	Piece

9" Laser LED Driving Light

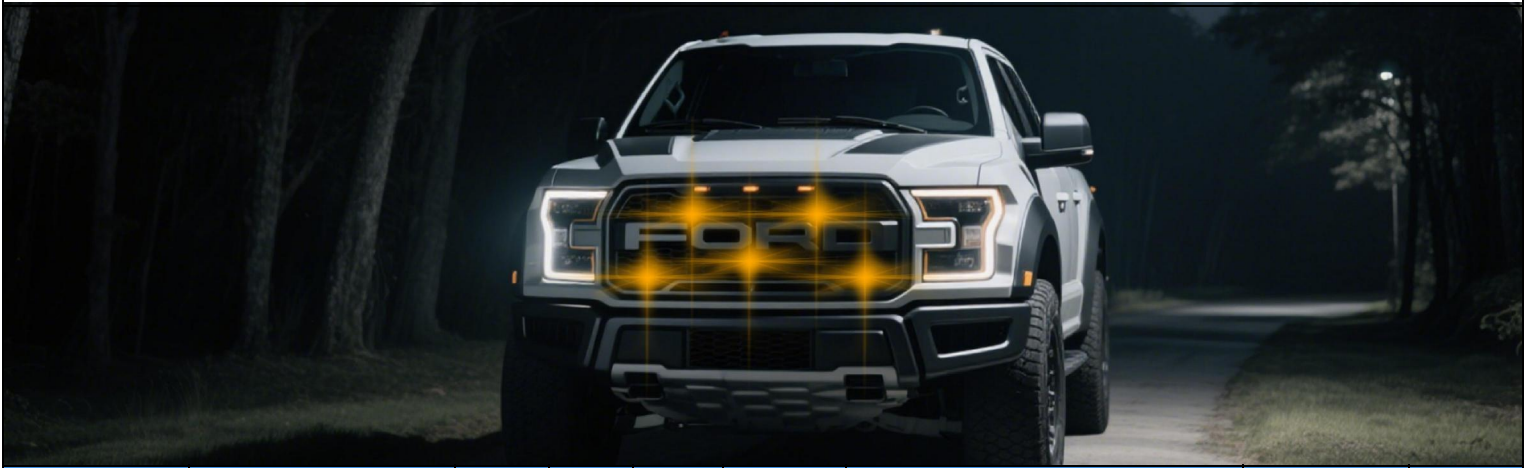
ALO-CR7-B (with Laser LED)		9"	130W	Osram 3W	Combo + Laser	1. LED Chips: Osram 3W 2. Input Voltage : 9V-36V 3. Color Temperature: 6500K 4. Beam Pattern: Combo+ Laser 5. Connector Type: Waterproof DT Connector 6. Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Working Temperature: -40°C~145°C 9. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 10. Average Lifespan: 50,000 hours+ 11. Add \$2.3 get small DT connector add \$11.8 to get wiring, For control 2 lights: add \$18.3	55x31x29cm 12.8kg 4 pcs per carton	Piece
-------------------------------	---	----	------	----------	---------------	--	--	-------


Jeep Headlight & Fog Light



Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
ALO-M-1 (Black/Silver face)		7"	H:40W L:20W 1350LM/1 770LM	CREE 5W/10W White	High/Low Beam	1. Beam: High/Low Beam 2. Color Temperature: 6000K 3. Connector Plug: H4/H13 4. Voltage: 9-36V 	62x40x34cm 13.5KG 10pcs per carton	Piece
ALO-M-1C (Black/Silver face with DRL, DOT)		7"	H:55W; L:50W/ DRL10W 3450LM/ 3360LM	ADR/ EMark/ DOT	High/Low Beam, DRL	1. White halo light as DRL 2. Voltage : 9-36V 	62x40x34cm 13.5KG 10pcs per carton	Piece
ALO-M-2B (with ring for DRL/Turn light)		4"	6PCS@ 30W	CREE 5W White/ Amber	Fog Light	Ring can be white/yellow, Work as DRL / Turn Light 	47x30x36.5cm 12.5KG 24pcs per carton	Piece

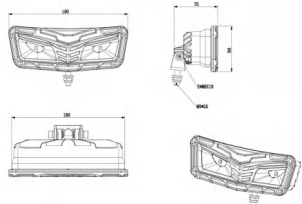
Dual Color Grille Light (White & Yellow)






Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit	
★ALO-W-1.5-L25T6	 3 Options  WhiteGoldenMixed	1.5"*2.5"	40W	7545	Yellow, White, Yellow & white mixed		1.LED Chips: 40W 2. Input Voltage : DC12V-24V 3.Color Temperature: 6500K, 3000K 4. Housing Material: Aluminum 6063 5.Connector Type: Waterproof Connector 6. Working Temperature: -40°C~145°C 7. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature etc. 8. Average Lifespan: 50,000 hours+ 9. Remote control , strobe device & wiring harness for controlling 2 lights : Add \$ 21.6	47x35x32cm 12KG 20 pcs per carton	Piece

7" Multi-functional Tail Light



Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
★ALO-L-7-E38T3	 	7.5"*2.6"	40W	5050	Brake light Strobe light Reverse light DRL Warning light	1.LED Chips: 20W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Waterproof Rate: IP68 & IP69K 5. Housing Material: Aluminum 6063 6. Working Temperature: -40°C~145°C 7. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature etc. 8. Average Lifespan: 50,000 hours+ Brake lights: Left & right "eyes" illuminate solid red Strobe lights: Left and right "eyes" flash red Reverse lights: Left and right "eyes" illuminate white Daytime Running Light (DRL): Center red "eyebrow" activates with a start-up sequence, then remains on Warning light: Center amber "eyebrow" illuminates; when DRL and warning are powered simultaneously, only the warning light remains on 	45x40x22cm 13KG 16 pcs per carton	Piece

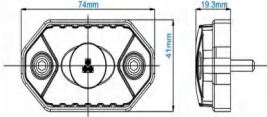
Single Pack Rock light

Model	Picture	Size	Watt	LED Chips	Beam	Specs	Carton Size & Weight	Unit
★ALO-Y-D-2		2"	15W	Osram 5W	White	1. Single Colors and RGB color to choose from. 2. LED Chips: Osram/Cree 5W/3W 3. Waterproof: IP68& IP69K 4. DuPont painting, Aluminum housing 5. Operating temperature: -40°C~145°C 6. Average Lifespan: 50,000 hours+	59x47x23cm 20kg 100pcs per carton	Piece
ALO-Y-2-R		2"	9W	CREE 3W	Red			
ALO-Y-2-G		2"	9W	CREE 3W	Green			
ALO-Y-2-L		2"	9W	CREE 3W	Blue			
ALO-Y-2-A		2"	9W	CREE 3W	Amber			
★ALO-Y1-2-RGB		2"	9W	CREE 3W	RGB			
★ALO-Y-2-H2		2"	15W	3570	White & Amber		59x47x23cm 20kg 100pcs per carton	Piece
★ALO-Y6-2-W		2"	15W	Osram 5W	White			
★ALO-Y3-W		2.4"*3.1"	22.5W	2835	White			Piece

RGB Rock Light Kit




Model	Picture	Size	Watt	LED Chips	Beam	Specs	Carton Size & Weight	Unit
ALO-Y1D-2-RGB-D4		2"	36W	RGB	/	1. 4pcs/6pcs/8pcs Kit to choose from. 2. LED Chips: Cree3W 3. Waterproof: IP68& IP69K 4. DuPont painting, Aluminum housing 5. Operating temperature: -40°C~145°C 6. Average Lifespan: 50,000 hours+ 7. Wireless Control RGB Rock Light kit, change colors via mobile phone APP	52x40x25cm 11.2kg 5pcs per carton	Kit

★ALO-Y1D-2-RGB-D6		2"	54W	RGB	/		52x40x25cm 12kg 5pcs per carton	Kit
ALO-Y1D-2-RGB-D8		2"	72W	RGB	/		47x30x32cm 12kg 4 pcs per carton	Kit

RGBW Rock Light Kit

Model	Picture	Size	Watt	LED Chips	Beam	Specs	Carton Size & Weight	Unit
★ALO-Y6-2-RGBW-D4		2"	48W	RGBW	/	1. 4pcs/6pcs/8pcs Kit to choose from. 2. LED Chips: 3535 3. Waterproof: IP68& IP69K 4. DuPont painting, Aluminum housing 5. Operating temperature: -40°C~145°C 6. Average Lifespan: 50,000 hours+ 7. Wireless Control RGBW Rock Light kit, change colors via mobile phone APP	52x40x25cm 11.2kg 5pcs per carton	Kit
★ALO-Y6-2-RGBW-D6		2"	72W	RGBW	/		46.5x29x31cm 9.8kg 4pcs per carton	Kit
★ALO-Y6-2-RGBW-D8		2"	96W	RGBW	/		47x30x32cm 12kg 4 pcs per carton	Kit

High Power RGBW LED Rock Light Kits

ALO-Y3-RGBW-4		2.4"*3.1"	192W	RGBW	/	1.2pcs/4pcs/6pcs/8pcs Kit to choose from. 2. LED Chips: 4w *12pcs 3. Waterproof: IP68& IP69K 4. DuPont painting, Aluminum housing 5. Operating temperature: -40°C~145°C 6. Average Lifespan: 50,000 hours+ 7. Wireless Control RGB Rock Light kit, change colors via mobile phone APP		Kit
ALO-Y3-RGBW-6		2.4"*3.1"	288W	RGBW	/		48x40x27cm 13.3kg 4pcs per carton	Kit
ALO-Y3-RGBW-8		2.4"*3.1"	384W	RGBW	/		48x40x27cm 16.4kg 4pcs per carton	Kit

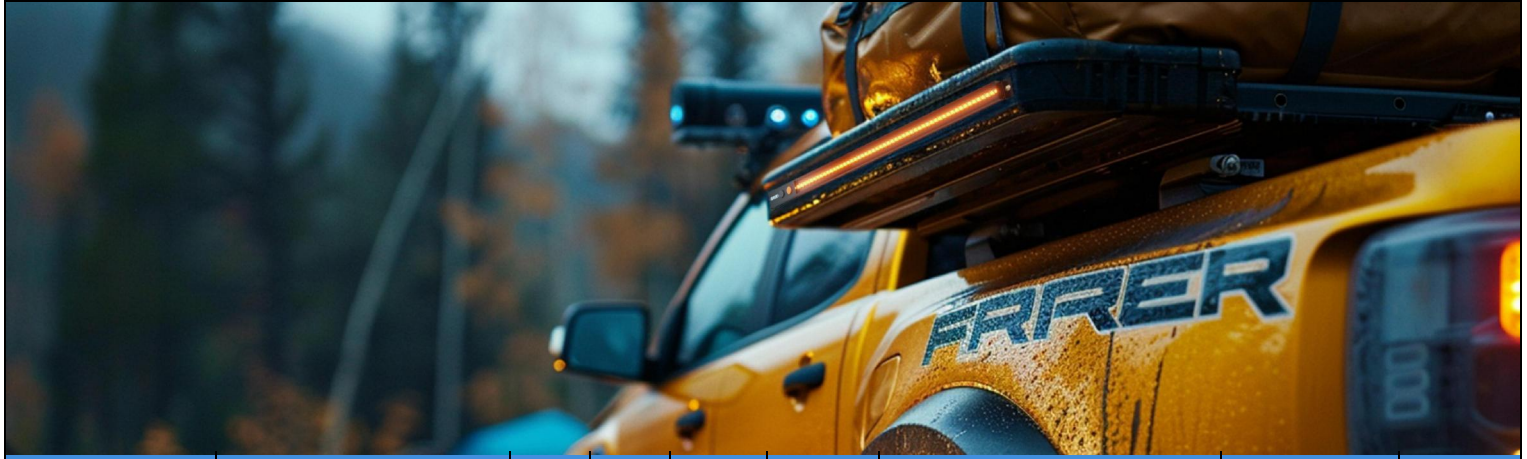


Model	Picture	Size	Watt	LED Chips	Beam	Specs	Carton Size & Weight	Unit
-------	---------	------	------	-----------	------	-------	----------------------	------

APP+Switch Control RGB Atmosphere

ALO-WG-00016		/	12~32W	5050 SMD	RGB	1. Output: DC 12V=2A 2. Voltage: 5V(USB) , 12V(Car Cigarette lighter) 3. Power: 12~32W 4. LED Chips: 5050 SMD 5. LED quantity: 12*4 6. Front seat cable length: 130cm/4.2ft*2 7. Rear seat cable length: 180cm/5.9ft*2 8. Light strip size: 22.5cm*1.3cm*0.5cm 9. Connectivity Technology: Bluetooth 10. Syncs with music rhythm 11. DIY modes and 16 million colors: white/red/blue/lemon yellow/orange/green/pink purple/ice blue 12. Intelligent APP control 13. 2-line design, easy installation	42.5x37x49cm 15kg 50pcs per carton	Kit
--------------	---	---	--------	----------	-----	--	--	-----

Dimmable Camping Light



Model	Picture	Size	Watt	LED Chips	Beam	Specs	Carton Size & Weight	Unit
★ALO-CL-300	   	30cm	6W	2835	White & Amber	1.LED Chips: 2835 2. Input Voltage: DC12V 3.Color Temperature: 5700K, 1600K 4.Beam Pattern: Combination 5.Waterproof Rate: IP68 & IP69K 6. Housing Material: Aluminum 6063 7. Bracket: Magnetic 8.Control Way: Button Control 9.Working Temperature: -40°C~145°C 10. Average Lifespan: 50,000 hours+ 11. Add \$1.2 to get small connector with 1.2m cable 12. Light cover option: Add \$0.2 for 300 cm light cover Add \$0.4 for 600 cm light cover Add \$0.7 for 900 cm light cover	43x34x35cm 10kg 100 pcs per carton	Piece
★ALO-CL-600		60cm	9W	2835	White & Amber		74x34x18.5cm 10kg 50pcs per carton	Piece
★ALO-CL-900		90cm	12W	2835	White & Amber		10.7x34x15.2cm 12kg 40 pcs per carton	Piece


Upgraded Dimmable Camping Light

ALO-CL2-300	   	30cm	6W	2835	White & Amber	1.LED Chips: 2835 2. Input Voltage: DC12V-24V 3.Color Temperature: White: 5000-5700K; Amber: 1700-1900K 4.Beam Pattern: Combination 5.Waterproof Rate: IP68 & IP69K 6. Housing Material: Aluminum 6063 7. Bracket: Magnetic + Screw fixing 8.Control Way: Control box 9.Working Temperature: -40°C~145°C 10. Average Lifespan: 50,000 hours+		Piece
ALO-CL2-600		60cm	9W	2835	White & Amber			Piece
ALO-CL2-900		90cm	12W	2835	White & Amber			Piece


Marine Series LED Light



Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
Marine Series LED Light								
ALO-M-Y-D-2		2"	15W	Osram 5W	White	1.LED Chips: Osram/Cree 5W/3W 2. Waterproof: IP68& IP69K 3. AkzoNobel Powdering, Aluminum housing 4. Stainless steel screws 5.Operating temperature: -40°C~145°C 6. Average Lifespan: 50,000 hours+ 	59x47x23cm 20kg 100 pcs per carton	Piece
ALO-M-Y-2-R			9W	CREE 3W	Red			
ALO-M-Y-2-G			9W	CREE 3W	Green			
ALO-M-Y-2-L			9W	CREE 3W	Blue			
ALO-M-Y-2-A			9W	CREE 3W	Amber			
ALO-M-L-2-E13T		2"	20W	Osram 10W	120°	1.LED Chips: Osram 10W 2. Input Voltage: 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: 120°/Flood/Combo 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Stainless steel screws and brackets 9.AkzoNobel Powdering: 360° Protection against UV, salt water,corrosion	59x40x35cm 17.7kg 45 pcs per carton	Piece
ALO-M-L-4-E13T		4"	40W	Osram 10W	120°	9.Working Temperature: -40°C~145°C 10.Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12.Add \$1.2 get small DT connector or add \$5.8get Standard wire harness; ALO-M-W1-2-E4T, ALO-M-W-4-C27T3;Standard wire harness option: For control 1 light: add \$6.9; For control 2 lights: add \$9.2	52*51*35cm 21kg 36 pcs per carton	Piece
ALO-M-W1-2-E4T		3"	40W	Osram 10W	Flood		69x30x16cm 11.5kg 10 pcs per carton	Piece
ALO-M-W-4-C27T3		4"	120W	Osram 10W	Combo		33*30*31cm 13.4KG 8 pcs per carton	Piece
ALO-M-R5H		7"	144W	Osram 6W	Combo	1.LED Chips: Osram 6W 2. Input Voltage: 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combo/Spot 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Aluminum & White coating 9.AkzoNobel Powdering: 360° protection against UV, salt water,corrosion	52x36x33 cm 11.5 kg 4 pcs per carton	Piece

ALO-M-R7H		9"	198W	Osram 6W	Spot	10. Working Temperature: -40°C~145°C 11. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 12. Average Lifespan: 50,000 hours+ 13. Add \$1.2-\$2.3 get small DT connector; Wire harness: For control 1 light: add \$11.8; For control 2 lights: add \$13.3	62x41x34cm 14kg 4 pcs per carton	Piece																																	
ALO-M-D6D1-10		10"	100W	Osram 5W	Combo	1. LED Chips: Osram 5W 2. Input Voltage: 9V-36V 3. Color Temperature: 6500K 4. Beam Pattern: Combo 5. Connector Type: Waterproof DT Connector 6. Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Stainless steel screws and brackets 9. AkzoNobel Powdering: 360° Protection against UV, salt water, corrosion 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Add \$1.2-\$2.3 get small connector or add \$56.9-\$9.2 get Standard wire harness	46x37x25cm 13.2kg 8 pcs per carton	Piece																																	
ALO-M-C-D6D1-20	  <table><tr><th rowspan="2">Size</th><th rowspan="2">LED</th><th colspan="4">Size(mm)</th></tr><tr><th>L</th><th>D</th><th>H1</th><th>H2</th></tr><tr><td>20"</td><td>40</td><td>562.2±3</td><td>50</td><td>75.8</td><td>48.1</td></tr><tr><td>30"</td><td>60</td><td>818.2±3</td><td>50</td><td>75.8</td><td>48.1</td></tr><tr><td>40"</td><td>80</td><td>1074.2±3</td><td>50</td><td>75.8</td><td>48.1</td></tr><tr><td>50"</td><td>100</td><td>1330.2±3</td><td>50</td><td>75.8</td><td>48.1</td></tr></table>	Size	LED	Size(mm)				L	D	H1	H2	20"	40	562.2±3	50	75.8	48.1	30"	60	818.2±3	50	75.8	48.1	40"	80	1074.2±3	50	75.8	48.1	50"	100	1330.2±3	50	75.8	48.1	20"	200W	Osram 5W	Combo	62x29x30cm 14kg 6 pcs per carton	Piece
Size				LED	Size(mm)																																				
		L	D		H1	H2																																			
20"	40	562.2±3	50	75.8	48.1																																				
30"	60	818.2±3	50	75.8	48.1																																				
40"	80	1074.2±3	50	75.8	48.1																																				
50"	100	1330.2±3	50	75.8	48.1																																				
ALO-M-C-D6D1-30	30"	300W	Osram 5W	Combo	91x29x31cm 14.8kg 4 pcs per carton																																				
ALO-M-C-D6D1-40	40"	400W	Osram 5W	Combo	116x30x31cm 17.5kg 4 pcs per carton																																				
ALO-M-S5D1-10-H		10"	50W	Osram 5W	Combo		41x38x39cm 15kg 16 pcs per carton	Piece																																	
Bowfishing LED Light Bar																																									
ALO-M-DY-D6BA-20		20"	White: 55W Yellow: 66W	2020	Scene	1. LED Chips: 2020 2. Input Voltage: DC12-24V 3. Color Temperature: White: 6000-6500K Yellow: 1700-1800K 4. Beam Pattern: Combination 5. Connector Type: Waterproof DT Connector 6. Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Stainless steel screws & bracket 9. AkzoNobel Powdering: 360° Protection against UV, salt water, corrosion 10. Control Way: Wiring Rotating Button /Remote Control 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Including Wiring harness	63x35x26cm 16.6kg 6 pcs per carton	Piece																																	

Model	Picture	Specs	Unit
O Style Mounts Sound Damper			
ALO-AO100		1inch O style Mounts accessories, with Anti-UV painting, in Pair	Pair
ALO-AO175		1.75 inch O style Mounts, in pair	Pair
ALO-AO200		2 inch O style Mounts, in pair	Pair
ALO-AO250		2.5 inch O style Mounts, in pair	Pair
ALO-AO275		2.75inch O style Mounts, in pair	Pair
ALO-AO300		3 inch O style Mounts, in pair	Pair
Holder and Bracket			
ALO-AH39		Hook Bracket for D5 and Screwless Series dual row light bars(1pcs)	Piece
ALO-AH55		Slider Bracket for RGB Light Series Single Row Light (1pcs)	Piece
ALO-AH49		Hook Bracket for Screwless Series Singlerow light bars(1pcs)	Piece
ALO-AH5		Oblique pillars Bar Light Mount (1pcs) All size are available: 1", 1.25", 1.5", 1.75", 2", 2.25", 2.5", 2.75", 3", 3.25".	Piece
ALO-AH6		Horizontal Bar Light Mount (1pcs) All size are available: 1", 1.25", 1.5", 1.75", 2", 2.25", 2.5", 2.75", 3", 3.25".	Piece
ALO-AH7		Vertical Bar Light Mount (1pcs) All size are available: 1", 1.25", 1.5", 1.75", 2", 2.25", 2.5", 2.75", 3", 3.25".	Piece
ALO-AH41		Horizontal Bar Clamp Mounting Kit 0.75"/1"/1.25"	Pair
ALO-AH42		Horizontal Bar Clamp Mounting Kit 1"/ 1.5"/ 1.75"/ 2"	Pair
ALO-AH64		Slider Bracket for S10 Series Single Row Light	Piece
ALO-AH65		Slider Bracket for D10 Series Dual Row Light	Piece
ALO-AH66		Universal Multi-Function Pole Clamp Bracket 18mm -32mm	Piece
Sound Damper			
ALO-ANB1		Black Sound damper for Heavy Duty Series dual row light	Piece
ALO-ANW1		White Sound damper for Heavy Duty Series dual row light	Piece
Cover for Light			
ALO-AC10D6A		Amber lens cover for 10" D6 Screwless dual row light	Piece
ALO-AC10D6H		Black lens cover for 10" D6 Screwless dual row light	Piece
ALO-AC10SA		Amber lens cover for 10" S5 single row	Piece
ALO-AC10SH		Black lens cover for 10" S5 single row	Piece
ALO-AC10S5RQH		Black lens cover for 10" S5/S6 RGB , S6 Dual Color seires	Piece
ALO-ACS10S		Black lens cover for 10" S10 Series single row light	Piece
ALO-ACS10SA		Amber lens cover for 10" S10 Series single row light	Piece

ALO-ACS10SC		Clear lens cover for 10" S10 Series single row light	Piece
ALO-AC10DH		Black lens cover for 10" Heavy Duty Series & D10 Series Dual row light	Piece
ALO-AC10DA		Amber lens cover for 10" Heavy Duty Series & D10 Series Dual row light	Piece
ALO-AC10DC		Clear lens cover for 10" Heavy Duty Series & D10 Series Dual row light	Piece
ALO-ACL2WA		Amber lens cover for 2" single row light	Piece
ALO-ACL2WH		Black lens cover for 2" single row light	Piece
ALO-AC2WA		Amber lens cover for W series work light	Piece
ALO-AC2WH		Black lens cover for W series work light	Piece
ALO-ACD3WC		Clear lens cover for D3 series work light	Piece
ALO-ACD3WA		Amber lens cover for D3 series work light	Piece
ALO-ACD3WH		Black lens cover for D3 series work light	Piece
ALO-AC4SC-P		Clear lens cover for ALO-P-L-4-P31T7-AW	Piece
ALO-AC4SH-P		Black lens cover for ALO-P-L-4-P31T7-AW	Piece
ALO-AC4SA-P		Amber lens cover for ALO-P-L-4-P31T7-AW	Piece
ALO-AC4W		Black lens cover for 4" work light	Piece
ALO-AC4Y		Black lens cover for ALO-W-4-R12T3-AW	Piece
ALO-AC4YA		Amber lens cover for ALO-W-4-R12T3-AW	Piece
ALO-AC6Y		Black lens cover for ALO-W-6-R19Y-AW	Piece
ALO-AC6YA		Amber lens cover for ALO-W-6-R19Y-AW	Piece
ALO-AC4R		Black lens cover for 4" driving light	Piece
ALO-AC5RH-P		Black lens cover for 5" driving light	Piece
ALO-AC5RC-P		Clear lens cover for 5" driving light	Piece
ALO-AC5RA-P		Amber lens cover for 5" driving light	Piece
ALO-AC5R		Black lens cover for 7" driving light	Piece
ALO-AC5RA		Amber lens cover for 7" driving light	Piece
ALO-AC7R		Black lens cover for 9" driving light	Piece
ALO-AC7RA		Amber lens cover for 9" driving light	Piece
ALO-AC7YC		Clear lens cover for ALO-P-R-7-R15Y-AW	Piece
ALO-AC7YA		Amber lens cover for ALO-P-R-7-R15Y-AW	Piece
ALO-AC7Y		Black lens cover for ALO-P-R-7-R15Y-AW	Piece
ALO-AC9YC		Clear lens cover for ALO-P-R-9-R11Y-AW	Piece
ALO-AC9YA		Amber lens cover for ALO-P-R-9-R11Y-AW	Piece
ALO-AC9Y		Black lens cover for ALO-P-R-9-R11Y-AW	Piece

ALO-AC6LA		Amber lens cover for 6" quad light	Piece
Wire Harness and Switch			
ALO-AW6		Splitter cable for 2 lights	Piece
ALO-AW7		Splitter cable for 4 lights	Piece
ALO-AW27		Wiring harness for 2"/ 4" LED work light Include relay, switch, fuse and waterproof connector	Piece
ALO-AW21		Wiring harness for one pair of 2"/4"/6"/10" LED lights Include relay, switch, fuse and waterproof connector	Piece
ALO-AW103		Wiring harness for Double/Single row 4"/6"/10"/20". Include relay, switch, fuse and waterproof connector	Piece
ALO-AW26		Wiring harness for Double/Single row 30"/40"/50". Include relay, switch, fuse and waterproof connector	Piece
ALO-AK1		Two-position On/Off switch, with LED indicator light	Piece
ALO-AK2		Waterproof Two-position On/Off switch, with LED indicator light	Piece
ALO-AK22		Two-position Rock Switch with LED indicator light	Piece
ALO-ASS01		Safety set screw(1pcs key,2pcs screw nut)	Piece
Control Kit			
★ ALO-BT07-8		9-Gang Control System Specification: 1.Input Voltage: 12V/24V DC 2. Number of Circuits and Relay: 9 3.Max Ampere and Power: Port 1: 22A, 290W / Port 2: 20A,264W/ Port 3-4 : 10A, 132W/ Port 5-8 : 5A, 53W Port 9-12 RGB Beam : 4A, 26W 4.Control Type: Bluetooth & APP Control / Panel Control 5. Control Box Dimension : 136.5x105.3x34.7mm	Set
RGB Cable (Optional Parts of ALO-BT07-8)		cable for 1 RGB light	Piece
		Splitter cable for 2 RGB lights	
		Splitter cable for 4 RGB lights	
		Splitter cable for 6 RGB lights	
		Splitter cable for 8 RGB lights	
ALO-JC01 (6 switch)		Universal 6-Gang Touch Pad Control System Specification: 1. Input Voltage: 12V DC 2. Number of Circuits and Relay: 6 3.Max Power: 720W 4.Max Total Current: 60A 5.Max Current per Relay: 30A (equipped with 20A fuse) 6. Switch Type: Touch Pad On/Off, with blue back-light LED 7. Switch Panel Dimension: 95x65x10mm 8. Control Box Dimension : 159x89x83mm	Piece

ALO-JC02 (8 switch)		1. Input Voltage: 12V 24VDC 2. Number of Circuits and Relay: 8 3. Max Power: 600W-1200W 4. Max Total Current: 60A 5. Max Current per Relay: 30A (equipped with 20A fuse) 6. Switch Type: Touch Pad On/Off, with blue back-light LED 7. Switch Panel Dimension: 115*15*66mm 8. Control Box Dimension : 190*34*105mm	Piece
ALO-BT06-1		Bluetooth control box for controlling 1 light	Piece
ALO-BT06-2		Bluetooth control box for controlling 2 lights	Piece
ALO-BT06-4		Bluetooth control box for controlling 4 lights	Piece
ALO-BT06-6		Bluetooth control box for controlling 6 lights	Piece
ALO-BT06-8		Bluetooth control box for controlling 8 lights	Piece
Flip & Stepless Roof Rack Bracket			
★ ALO-AH152		Key Specifications 1. Adjustable Angle: 0-90° 2. Material: 304 Stainless Steel 3. Working Voltage: 10-30V 4. Wireless Remote Frequency: 433 MHz 5. Ingress Protection: IP68 6. Operating Temperature: -40°C to 80°C 7. Compatible Light Bar Length: Min: 748 mm ~ Max: 1138 mm 8. Two control modes supported: Wired control/Wireless remote control	Kit
ALO-AH155		Universal Manual Flip-Over Bracket	Kit
★ ALO-AH153		Gimbal Mount Bracket compatible with ALO-W-6-R19Y-AW	Kit
★ ALO-AH156		Gimbal Mount Bracket compatible with ALO-P-R-5-C39D1-AW	Kit
Car Air Purifier Ionizer			
JO-6291		Car Air Purifier Ionizer Silver / Black / Gold	Piece