



2026
CATALOG



SHENZHEN AURORA TECHNOLOGY LIMITED.

Leading Manufacturer in Automotive Lighting, Provide One-Stop Solutions & Service

 Website: www.szaurora.com  Email: info@szaurora.com  Tel: +86 0755 82682990

 Address: AURORA Industry Park, ShunSheng Road 9#, Pingdi Street, Longgang District, Shenzhen, Guangdong, China



Shenzhen Aurora Technology Limited

Professional manufacturer with IATF16949, ISO9001, ISO14001, ISO45001 certificates.
 Founded in 2011, with 35,000 square meters industrial park, more than 400 employees.
 Specialized in LED lighting products, like LED offroad lights, LED headlight bulbs, ATV Lights, UTV Lights
 Motorcycle lights, Marine LED lights, Industrial Lights, Mining Lights, Agriculture Lights, etc.



FACTORY VIDEO

We have strong R&D team and get below advantages

- 200+ innovation patents until now.
- Products got IP68 & IP69K, Emark, SAE, CE, RoHS etc.
- Advanced equipments like CNC machines, SMT lines and X-ray for high efficiency and good quality control.
- Professional equipments to support tests like Darkroom Beam Test, Lumen, Aging test, High & low temperature, Vibration, and UV test. Ensure high and reliable quality.



IATF16949



ISO9001



ISO14001



ISO45001



National High-tech Enterprise

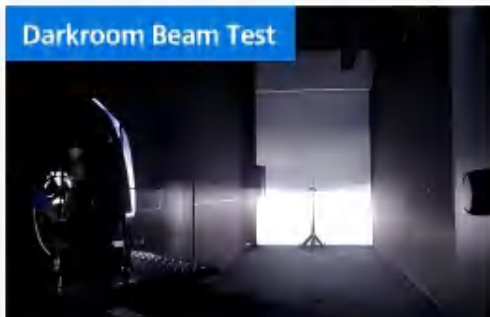
SMT Production Line



CNC Production Line



Darkroom Beam Test



Production Line



Waterproof Test



High & Low Temperature test



Lumen Test
















Vibration Test



LED Headlight Bulb

Model	Picture	Drawing	Series	Watt	LED Chips	Available Buckle	Specifications	G.W/ CTN CTN/ Size CM
★ALO-F12A			Fan +ALL IN ONE (Built-in Driver)	35W	Trinity Automotive 7035	★Single Beam: H1/H3/H7/H18 ★Single Beam: H8/H9/H11/9005/9006	1. Operating Voltage:12V DC 2. LED Quantity: 2pcs 3. Color Temperature: 6500K 4. Material: Aluminum 5. Built in Driver+Fan 6. Lifespan: 50000h 7. Work Temperature:-40°C~85°C 8. IP Rating: IP68	*Inner Box Weight: 0.07KG *Inner Box Size:15.5 x 10.5 x 5.6 *CTN Weight: 6.8KG *CTN Size:55 x 46 x 29 *Carton Qty: 80/Pair
★ALO-F12A			Fan +ALL IN ONE (Built-in Driver)	35W	Trinity Automotive 7035	★High & Low Beam: H4/H19	1. Operating Voltage:12V DC 2. LED Quantity: 4pcs 3. Color Temperature: 6500K 4. Material: Aluminum 5. Built in Driver 6. Lifespan: 50000h 7. Work Temperature:-40°C~85°C 8. IP Rating: IP68	*Inner Box Weight: 0.1KG *Inner Box Size:15.5 x 10.5 x 5.6 *CTN Weight: 9.0KG *CTN Size:55 x 46 x 29 *Carton Qty: 80/Pair
★ALO-V6			1+1 ALL IN ONE (Built-in Driver)	18W	Trinity Automotive 1860	★Single Beam: H1/H3/H7/H18/9012 ★Single Beam: H8/H9/H11/H16(JP)/9005/9006	1. Operating Voltage:9-24V 2. LED Quantity: 2pcs 3. Color Temperature: 6500K 4. Material: 6063 Aircraft Aluminum 5. Built in Driver 6. Lifespan: 50000h 7. Work Temperature:-40°C~85°C 8. IP Rating: IP68	*Inner Box Weight: 0.07KG *Inner Box Size:15.5 x 10.5 x 5.6 *CTN Weight: 6.8KG *CTN Size:55 x 46 x 29 *Carton Qty: 80/Pair
★ALO-V6			1+1 ALL IN ONE (Built-in Driver)	18W	Trinity Automotive 1860	★High & Low Beam: H4/H19/H13/9004/9007	1. Operating Voltage:9-24V 2. LED Quantity: 4pcs 3. Color Temperature: 6500K 4. Material: 6063 Aircraft Aluminum 5. Built in Driver 6. Lifespan: 50000h 7. Work Temperature:-40°C~85°C 8. IP Rating: IP68	*Inner Box Weight: 0.1KG *Inner Box Size:15.5 x 10.5 x 5.6 *CTN Weight: 9.0KG *CTN Size:55 x 46 x 29 *Carton Qty: 80/Pair
★ALO-F8B			1+1 FAN (Built-in Driver)	25W	Trinity Automotive 1860	★Single Beam: H1/H3/H7/H18/H8/H9/H11/H16JP/9005/9006/9012	1. Operating Voltage:9-24V 2. LED Quantity: 2pcs 3. Color Temperature: 6500K 4. Material: 6063 Aircraft Aluminum 5. Built in Driver 6. Lifespan: 50000h 7. Work Temperature:-40°C~85°C 8. IP Rating: IP68	*Inner Box Weight: 0.12KG *Inner Box Size:12.2 x 10. 6 x 4.8 *CTN Weight: 11.65KG *CTN Size:53 x 46 x 30 *Carton Qty: 80/Pair
★ALO-F8B			1+1 FAN (Built-in Driver)	25W	Trinity Automotive 1860	★High & Low Beam: H4/H19/H13/9004/9007	1. Operating Voltage:9-24V 2. LED Quantity: 4pcs 3. Color Temperature: 6500K 4. Material: 6063 Aircraft Aluminum 5. Built in Driver 6. Lifespan: 50000h 7. Work Temperature:-40°C~85°C 8. IP Rating: IP68	*Inner Box Weight: 0.14KG *Inner Box Size:12.2 x 10. 6 x 4.8 *CTN Weight: 13.0KG *CTN Size:53 x 46 x 30 *Carton Qty:80/Pair
★ALO-F2			1+1 FAN (Built-in Driver)	25W	Trinity Automotive 1860	★Single Beam: H1/H3/H7/H18/H8/H9/H10/H11/H16JP/H16EU/H18/9005/9006/9012/880/881/H27	1. Operating Voltage:9-24V 2. LED Quantity: 2pcs 3. Color Temperature: 6500K 4. Material: 6063 Aircraft Aluminum 5. Built in Driver 6. Lifespan: 50000h 7. Work Temperature:-40°C~85°C 8. IP Rating: IP68	*Inner Box Weight: 0.13KG *Inner Box Size:15.5 x 10.5 x 5.6 *CTN Weight: 12.5KG *CTN Size:55 x 46 x 29 *Carton Qty: 80/Pair
★ALO-F2			1+1 FAN (Built-in Driver)	25W	Lumileds ZES 5700K LED	★Single Beam: H1/H3/H7/H18/H8/H9/H10/H11/H16JP/H16EU/H18/9005/9006/9012/880/881/H27	1. Operating Voltage:9-24V 2. LED Quantity: 6pcs 3. Color Temperature: 5700K 4. Material: 6063 Aircraft Aluminum 5. Built in Driver 6. Lifespan: 50000h 7. Work Temperature:-40°C~85°C 8. IP Rating: IP68	*Inner Box Weight: 0.16KG *Inner Box Size:15.5 x 10.5 x 5.6 *CTN Weight: 13.5KG *CTN Size:55 x 46 x 29 *Carton Qty: 80/Pair
★ALO-F2			1+1 FAN (Built-in Driver)	25W	Trinity Automotive 1860	★High & Low Beam: H4/H19/H13/9004/9007/H15	1. Operating Voltage:9-24V 2. LED Quantity: 4pcs 3. Color Temperature: 6500K 4. Material: 6063 Aircraft Aluminum 5. Built in Driver 6. Lifespan: 50000h 7. Work Temperature:-40°C~85°C 8. IP Rating: IP68	*Inner Box Weight: 0.13KG *Inner Box Size:15.5 x 10.5 x 5.6 *CTN Weight: 12.5KG *CTN Size:55 x 46 x 29 *Carton Qty: 80/Pair
★ALO-F2			1+1 FAN (Built-in Driver)	25W	Lumileds ZES 5700K LED	★High & Low Beam: H4/H19/H13/9004/9007	1. Operating Voltage:9-24V 2. LED Quantity: 12pcs 3. Color Temperature: 6500K 4. Material: 6063 Aircraft Aluminum 5. Built in Driver 6. Lifespan: 50000h 7. Work Temperature:-40°C~85°C 8. IP Rating: IP68	*Inner Box Weight: 0.16KG *Inner Box Size:15.5 x 10.5 x 5.6 *CTN Weight: 13.5KG *CTN Size: 55 x 46 x 29 *Carton Qty: 80/Pair
★ALO-F2C			1+1 FAN RGB (Built-in Driver)	25W	Trinity Automotive 3030	★Single Beam: H7/H18/H8/H9/H11/H16JP/9005/9006/9012	1. Operating Voltage:9-24V 2. LED Quantity: 2pcs 3. Color Temperature: 6500K 4. Material: 6063 Aircraft Aluminum 5. Built in Driver 6. Lifespan: 50000h 7. Work Temperature:-40°C~85°C 8. IP Rating: IP68	*Inner Box Weight: 0.73KG *Inner Box Size:27 x 16.1 x 4.8 *CTN Weight: 15.6KG *CTN Size:52 x 35 x 29 *Carton Qty:20/Pair
ALO-F2C			1+1 FAN RGB (Built-in Driver)	25W	Trinity Automotive 3030	★High & Low Beam: H4/H19/9004/9007	1. Operating Voltage:9-24V 2. LED Quantity: 4pcs 3. Color Temperature: 6500K 4. Material: 6063 Aircraft Aluminum 5. Built in Driver 6. Lifespan: 50000h 7. Work Temperature:-40°C~85°C 8. IP Rating: IP68	*Inner Box Weight: 0.75KG *Inner Box Size:27 x 16.1 x 4.8 *CTN Weight: 16.8KG *CTN Size:52 x 35 x 29 *Carton Qty:20/Pair

Model	Picture	Drawing	Series	Watt	LED Chips	Available Buckle	Specifications	G.W/ CTN CTN/ Size CM
ALO-F2H			1+1 FAN (Built-in Driver)	30W	Trinity Automotive 3570	★Single Beam: H1/H7/H18/H8/H9/H11/ H16JP/9005/9006/9012	1. Operating Voltage:9-24V 2. LED Quantity: 2pcs 3. Color Temperature: 6500K 4. Material: 6063 Aircraft Aluminum 5. Built in Driver 6. Lifespan: 50000h 7. Work Temperature:-40°C~85°C 8. IP Rating: IP68	*Inner Box Weight: 0.2KG *Inner Box Size: 15.5 x 10.5 x 5.6 *CTN Weight: 17.2KG *CTN Size:55 x 46 x 29 *Carton Qty: 80/Pair
ALO-F2H			1+1 FAN (Built-in Driver)	30W	Trinity Automotive 3570	★High & Low Beam: H4/H19/H13	1. Operating Voltage:9-24V 2. LED Quantity: 4pcs 3. Color Temperature: 6500K 4. Material: 6063 Aircraft Aluminum 5. Built in Driver 6. Lifespan: 50000h 7. Work Temperature:-40°C~85°C 8. IP Rating: IP68	*Inner Box Weight: 0.21KG *Inner Box Size: 15.5 x 10.5 x 5.6 *CTN Weight: 18.0KG *CTN Size:55 x 46 x 29 *Carton Qty: 80/Pair
★ALO-F5			1+1 FAN (External Driver)	45W	Trinity Automotive 3570	★Single Beam: H1/H3/H7/H18/H8/H9/H10/H 11/H16JP/ 9005/9006/9012	1. Operating Voltage:9-24V 2. LED Quantity: 2pcs 3. Color Temperature: 6500K 4. Material: 6063 Aircraft Aluminum 5. External Driver 6. Lifespan: 50000h 7. Work Temperature:-40°C~85°C 8. IP Rating: IP68	*Inner Box Weight: 0.38KG *Inner Box Size: 19.4 x 15.8 x 5.1 *CTN Weight: 12.9KG *CTN Size:54 x 50 x 22 *Carton Qty: 30/Pair
★ALO-F5			1+1 FAN (External Driver)	45W	Trinity Automotive 3570	★High & Low Beam: H4/H19/H13/9004/9007	1. Operating Voltage:9-24V 2. LED Quantity: 4pcs 3. Color Temperature: 6500K 4. Material: 6063 Aircraft Aluminum 5. External Driver 6. Lifespan: 50000h 7. Work Temperature:-40°C~85°C 8. IP Rating: IP68	*Inner Box Weight: 0.41KG *Inner Box Size: 19.4 x 15.8 x 5.1 *CTN Weight: 13.7KG *CTN Size:54 x 50 x 22 *Carton Qty:30/Pair
★ALO-F6			1+1 FAN (External Driver)	55W	Trinity Automotive 3570	★Single Beam: H7/H18/H8/H9/H10/H11/ H16JP/9005/9006/ 9012	1. Operating Voltage:9-24V 2. LED Quantity: 2pcs 3. Color Temperature: 6500K 4. Material: 6063 Aircraft Aluminum 5. External Driver 6. Lifespan: 50000h 7. Work Temperature:-40°C~85°C 8. IP Rating: IP68	*Inner Box Weight: 0.37KG *Inner Box Size: 19.4 x 15.8 x 5.1 *CTN Weight: 12.5KG *CTN Size:54 x 50 x 22 *Carton Qty:30/Pair
★ALO-F6			1+1 FAN (External Driver)	55W	Trinity Automotive 3570	★High & Low Beam: H4/H19/H13/9004/9007	1. Operating Voltage:9-24V 2. LED Quantity: 4pcs 3. Color Temperature: 6500K 4. Material: 6063 Aircraft Aluminum 5. External Driver 6. Lifespan: 50000h 7. Work Temperature:-40°C~85°C 8. IP Rating: IP68	*Inner Box Weight: 0.41KG *Inner Box Size: 19.4 x 15.8 x 5.1 *CTN Weight: 13.5KG *CTN Size:54 x 50 x 22 *Carton Qty: 30/Pair
★ALO-G10J			1+1 Copper Braid (External Driver)	24W	Trinity Automotive 1860	★Single Beam: H1/H3/H7/H18/H8/H9/H10/H 11/H16JP/H16EU/9005/9006/ 9012/880/881/H27	1. Operating Voltage:9-24V 2. LED Quantity: 2pcs 3. Color Temperature: 6500K 4. Material: 6063 Aircraft Aluminum 5. External Driver 6. Lifespan: 50000h 7. Work Temperature:-40°C~85°C 8. IP Rating: IP68	*Inner Box Weight: 0.3KG *Inner Box Size:20.8 x 15.8 x 5.8 *CTN Weight: 7KG *CTN Size:58 x 35 x 24 *Carton Qty: 20/Pair
★ALO-G10J			1+1 Copper Braid (External Driver)	24W	Trinity Automotive 1860	★High & Low Beam: H4/H19/H13/H15/ 9004/9007	1. Operating Voltage:9-24V 2. LED Quantity: 4pcs 3. Color Temperature: 6500K 4. Material: 6063 Aircraft Aluminum 5. External Driver 6. Lifespan: 50000h 7. Work Temperature:-40°C~85°C 8. IP Rating: IP68	*Inner Box Weight: 0.34KG *Inner Box Size: 20.8 x 15.8 x 5.8 *CTN Weight: 7.8KG *CTN Size:58 x 35 x 24 *Carton Qty: 20/Pair
★ALO-G10			1+1 Copper Braid (External Driver)	21W	Lumileds ZES 6500K LED	★Single Beam: H1/H3/H7/H18/H8/H9/ H10/H11/H16JP/ 9005/9006/ 9012/880/881/H27	1. Operating Voltage:9-24V 2. LED Quantity: 6pcs 3. Color Temperature: 6500K 4. Material: 6063 Aircraft Aluminum 5. External Driver 6. Lifespan: 50000h 7. Work Temperature:-40°C~85°C 8. IP Rating: IP68	*Inner Box Weight: 0.38KG *Inner Box Size: 20.8 x 15.8 x 5.8 *CTN Weight: 8.7KG *CTN Size:58 x 35 x 24 *Carton Qty: 20/Pair
★ALO-G10			1+1 Copper Braid (External Driver)	21W	Lumileds ZES 6500K LED	★High & Low Beam: H4/H19/H13/9004/9007	1. Operating Voltage:9-24V 2. LED Quantity: 12pcs 3. Color Temperature: 6500K 4. Material: 6063 Aircraft Aluminum 5. External Driver 6. Lifespan: 50000h 7. Work Temperature:-40°C~85°C 8. IP Rating: IP68	*Inner Box Weight: 0.38KG *Inner Box Size:20.8 x 15.8 x 5.8 *CTN Weight: 8.7KG *CTN Size:58 x 34 x 25 *Carton Qty: 20/Pair

Model	Picture	Drawing	Series	Watt	LED Chips	Available Buckle	Specifications	G.W/ CTN CTN/ Size CM
ALO-F5B			Fan (External Driver)	45W	Trinity Automotive 3570	★Single Beam: H1/H3/H7/H18/H8/H9/ H11/9005/9006/ 9012/H27	1. Operating Voltage:9-24V 2. LED Quantity: 2pcs 3. Color Temperature:6500K 4. Material: 6063 Aircraft Aluminum 5. External Driver 6. Lifespan: 50000h 7. Work Temperature:-40℃~85℃ 8. IP Rating: IP68	*Inner Box Weight:0.355KG *Inner Box Size:19.5x15.8x5.3 *CTN Weight12.5KG *CTN size:54x50x22 *Carton Qty:30/Pair
ALO-F5B			Fan (External Driver)	45W	Trinity Automotive 3570	★High&Low Beam: H4/H19/H13/9004/9007	1. Operating Voltage:9-24V 2. LED Quantity: 4pcs 3. Color Temperature:6500K 4. Material: 6063 Aircraft Aluminum 5. External Driver 6. Lifespan: 50000h 7. Work Temperature:-40℃~85℃ 8. IP Rating: IP68	*Inner Box Weight:0.388KG *Inner Box Size:19.5x15.8x5.3 *CTN Weight13.7KG *CTN size:54x50x22 *Carton Qty: 30/Pair
★ALO-F11			Fan (External Driver)	100W	Trinity Automotive 7545	★Single Beam: H7/H18/H8/H9/ H11/9005/9006/ 9012	1. Operating Voltage:9-24V 2. LED Quantity: 2pcs 3. Color Temperature:6500K 4. Material: 6063 Aircraft Aluminum 5. External Driver 6. Lifespan: 50000h 7. Work Temperature:-40℃~85℃ 8. IP Rating: IP68	*Inner Box Weight: 0.387KG *Inner Box Size:19.5x15.8x5.3 *CTN Weight:12.6KG *CTN size:54x50x22 *Carton Qty: 30/Pair
★ALO-F11			Fan (External Driver)	100W	Trinity Automotive 7545	★High&Low Beam: H4/H19/H13/9004/9007	1. Operating Voltage:9-24V 2. LED Quantity: 4pcs 3. Color Temperature:6500K 4. Material: 6063 Aircraft Aluminum 5. External Driver 6. Lifespan: 50000h 7. Work Temperature:-40℃~85℃ 8. IP Rating: IP68	*Inner Box Weight: 0.42KG *Inner Box Size:19.5x15.8x5.3 *CTN Weight:13.7KG *CTN size:54x50x22 *Carton Qty: 30/Pair
★ALO-F17			Fan (External Driver)	45W	Trinity Automotive 7545	★Single Beam: H7/H18	1. Operating Voltage:9-24V 2. LED Quantity: 2pcs 3. Color Temperature:3000K&6500K 4. Material:Die-cast Aluminum 5. External Driver 6. Lifespan: 50000h 7. Work Temperature:-40℃~85℃ 8. IP Rating: IP68 9. Dual Color: White&Yellow	*Inner Box Weight: 0.387KG *Inner Box Size:19.5x15.8x5.3 *CTN Weight:12.6KG *CTN size:54x50x22 *Carton Qty: 30/Pair
ALO-F3			Fan (External Driver)	45W	Trinity Automotive 3570	★Single Beam: H1/H3/H7/H18/H8/H9/H10/H 11/9003/9005/9006/9012	1. Operating Voltage:9-24V 2. LED Quantity: 2pcs 3. Color Temperature:6500K 4. Material: 6063 Aircraft Aluminum 5. External Driver 6. Lifespan: 50000h 7. Work Temperature:-40℃~85℃ 8. IP Rating: IP68	*Inner Box Weight: 0.376KG *Inner Box Size19.5x15.8x5.3 *CTN Weight:12.5KG *CTN size:54x50x22 *Carton Qty: 30/Pair
ALO-F3			Fan (External Driver)	45W	Trinity Automotive 3570	★High&Low Beam: H4/H19/H13/9004/9007	1. Operating Voltage:9-24V 2. LED Quantity: 4pcs 3. Color Temperature:6500K 4. Material: 6063 Aircraft Aluminum 5. External Driver 6. Lifespan: 50000h 7. Work Temperature:-40℃~85℃ 8. IP Rating: IP68	*Inner Box Weight: 0.42KG *Inner Box Size:19.5x15.8x5.3 *CTN Weight:13.7KG *CTN size:54x50x22 *Carton Qty: 30/Pair
ALO-M5			Fan (External Driver)	25W	Trinity Automotive 1860	★Single Beam: H1/H3/H7/H18/H8/H9/ H10/H11/9005/ 9006/9012	1. Operating Voltage:9-24V 2. LED Quantity: 2pcs 3. Color Temperature:6500K 4. Material: 6063 Aircraft Aluminum 5. External Driver 6. Lifespan: 50000h 7. Work Temperature:-40℃~85℃ 8. IP Rating: IP68	*Inner Box Weight: 0.355KG *Inner Box Size:19.5x15.8x5.3 *CTN Weight:12.5KG *CTN size:54x50x22 *Carton Qty: 30/Pair
ALO-M5			Fan (External Driver)	25W	Trinity Automotive 1860	★High&Low Beam: H4/H19/H13/9004/9007	1. Operating Voltage:9-24V 2. LED Quantity: 4pcs 3. Color Temperature:6500K 4. Material: 6063 Aircraft Aluminum 5. External Driver 6. Lifespan: 50000h 7. Work Temperature:-40℃~85℃ 8. IP Rating: IP68	*Inner Box Weight: 0.364KG *Inner Box Size:19.5x15.8x5.3 *CTN Weight:13KG *CTN size:54x50x22 *Carton Qty: 30/Pair
ALO-F5C			Fan	25W	Trinity Automotive 7035	Single Beam: H11	1. Operating Voltage:9-24V 2. LED Quantity: 2pcs 3. Color Temperature:6500K 4. Material: 6063 Aircraft Aluminum 5. Built in Driver 6. Lifespan: 50000h 7. Work Temperature:-40℃~85℃ 8. IP Rating: IP68	*Inner Box Weight: 0.13KG *Inner Box Size:15.5 x 10.5 x 5.6 *CTN Weight: 12.5KG *CTN Size:55 x 46 x 29 *Carton Qty: 80/Pair
ALO-F3H			Fan	25W	Trinity Automotive 7035	Single Beam: H11/9005	1. Operating Voltage:9-24V 2. LED Quantity: 2pcs 3. Color Temperature:6500K 4. Material: 6063 Aircraft Aluminum 5. Built in Driver 6. Lifespan: 50000h 7. Work Temperature:-40℃~85℃ 8. IP Rating: IP68	*Inner Box Weight: 0.13KG *Inner Box Size:15.5 x 10.5 x 5.6 *CTN Weight: 12.5KG *CTN Size:55 x 46 x 29 *Carton Qty: 80/Pair

D Series LED Headlight Bulb


Model	PICTURE	Series	Cooling	Watt	LED Chips	Available Buckle	Specifications	G.W/ CTN CTN/ Size CM
★ALO-D1S-G1-ZZ		D Series	Fan (Built-in Driver)	45W	Trinity Automotive 4575	★Available Models: D1S	1. Operating Voltage:DC 12V 2. Color Temperature:6000K 3. Material: Zinc Alloy 4. Built-in smart decoding Driver 5. Lifespan: 50000h 6. Work Temperature:-40°C~85°C 7. IP Rating: IP68	*Inner Box Weight:0.4 KG *Inner Box Size: 17.3x16.2x6.5 *CTN Weight: 15 KG *CTN size: 69*37*35 *Carton Qty: 40/Pair
★ALO-D3S-G1-ZZ		D Series	Fan (Built-in Driver)	45W	Trinity Automotive 4575	★Available Models: D3S	1. Operating Voltage:DC 12V 2. Color Temperature:6000K 3. Material: Zinc Alloy 4. Built-in smart decoding Driver 5. Lifespan: 50000h 6. Work Temperature:-40°C~85°C 7. IP Rating: IP68	*Inner Box Weight:0.4 KG *Inner Box Size: 17.3x16.2x6.5 *CTN Weight: 15 KG *CTN size: 69*37*35 *Carton Qty: 40/Pair
★ALO-D2S-G1-ZZ		D Series	Fan (Built-in Driver)	45W	Trinity Automotive 5490	★Available Models: D2S	1. Operating Voltage:DC 12V 2. Color Temperature:6000K 3. Material: Zinc Alloy 4. Built-in smart decoding Driver 5. Lifespan: 50000h 6. Work Temperature:-40°C~85°C 7. IP Rating: IP68	*Inner Box Weight:0.4 KG *Inner Box Size: 17.3x16.2x6.5 *CTN Weight: 15 KG *CTN size: 69*37*35 *Carton Qty: 40/Pair
★ALO-D4S-G1-ZZ		D Series	Fan (Built-in Driver)	45W	Trinity Automotive 5490	★Available Models: D4S	1. Operating Voltage:DC 12V 2. Color Temperature:6000K 3. Material: Zinc Alloy 4. Built-in smart decoding Driver 5. Lifespan: 50000h 6. Work Temperature:-40°C~85°C 7. IP Rating: IP68	*Inner Box Weight:0.4 KG *Inner Box Size: 17.3x16.2x6.5 *CTN Weight: 15 KG *CTN size: 69*37*35 *Carton Qty: 40/Pair
★ALO-D5S-G1-ZZ		D Series	Fan (Built-in Driver)	45W	Trinity Automotive 7035	★Available Models: D5S	1. Operating Voltage:DC 12V 2. Color Temperature:6000K 3. Material: Zinc Alloy 4. Built-in smart decoding Driver 5. Lifespan: 50000h 6. Work Temperature:-40°C~85°C 7. IP Rating: IP68	*Inner Box Weight:0.4 KG *Inner Box Size: 17.3x16.2x6.5 *CTN Weight: 15 KG *CTN size: 69*37*35 *Carton Qty: 40/Pair
★ALO-D5S-G1-H5-ZZ		D Series	Fan (Built-in Driver)	45W	Trinity Automotive 7545	★Available Models: D5S	1. Operating Voltage:DC 12V 2. Color Temperature:5700K-6500K 3. Material: Zinc Alloy 4. Built-in smart decoding Driver 5. Lifespan: 50000h 6. Work Temperature:-40°C~85°C 7. IP Rating: IP68 8. Dual Color: White&Yellow	*Inner Box Weight:0.4 KG *Inner Box Size: 17.3x16.2x6.5 *CTN Weight: 15 KG *CTN size: 69*37*35 *Carton Qty: 40/Pair
★ALO-D		D Series	Fan (Built-in Driver)	35W /55W	Trinity Automotive 4575	★Available Models: D1S, D2S, D2H D3S, D4S, D5S, D8S	1. Operating Voltage:DC 12V 45V 90V 2. Color Temperature:6000K 3. Material: Aluminum 4. Built-in smart decoding Driver 5. Lifespan: 50000h 6. Work Temperature:-40°C~85°C 7. IP Rating: IP68	*Inner Box Weight:0.4 KG *Inner Box Size: 17.3x16.2x6.5 *CTN Weight: 15 KG *CTN size: 69*37*35 *Carton Qty: 40/Pair
ALO-D-A		D Series	Fan (Built-in Driver)	100W	Trinity Automotive 4575	★Available Models: D1S,D3S	1. Operating Voltage:90V(D1S)/45V(D3S) 2. Color Temperature:6000K 3. Material: Aluminum 4. Built-in smart decoding Driver 5. Lifespan: 50000h 6. Work Temperature:-40°C~85°C 7. Dual Copper Tubes	*Inner Box Weight:0.4 KG *Inner Box Size: 17.3x16.2x6.5 *CTN Weight: 15 KG *CTN size: 69*37*35 *Carton Qty: 40/Pair
ALO-D-B		D Series	Fan (Built-in Driver)	60W	Trinity Automotive 3510	★Available Models: D1S,D3S	1. Operating Voltage:90V(D1S)/45V(D3S) 2. Color Temperature:6000K 3. Material: Aluminum 4. Built-in smart decoding Driver 5. Lifespan: 50000h 6. Work Temperature:-40°C~85°C 7. Dual Copper Tubes	*Inner Box Weight:0.4 KG *Inner Box Size: 17.3x16.2x6.5 *CTN Weight: 15 KG *CTN size: 69*37*35 *Carton Qty: 40/Pair
ALO-D-D		D Series	Fan (Built-in Driver)	60W	Trinity Automotive	★Available Models: D1S,D3S,D8S	1. Operating Voltage:90V(D1S)/45V(D3S,D8S) 2. Color Temperature:6000K 3. Material: Aluminum 4. Built-in smart decoding Driver 5. Lifespan: 50000h 6. Work Temperature:-40°C~85°C 7. Dual Copper Tubes	*Inner Box Weight:0.4 KG *Inner Box Size: 17.3x16.2x6.5 *CTN Weight: 15 KG *CTN size: 69*37*35 *Carton Qty: 40/Pair
ALO-D-C		D Series	Fan (Built-in Driver)	60W	Trinity Automotive	★Available Models: D2S,D4S	1. Operating Voltage:90V(D2S)/45V(D4S) 2. Color Temperature:6000K 3. Material: Aluminum 4. Built-in smart decoding Driver 5. Lifespan: 50000h 6. Work Temperature:-40°C~85°C 7. Dual Copper Tubes	*Inner Box Weight:0.4 KG *Inner Box Size: 17.3x16.2x6.5 *CTN Weight: 15 KG *CTN size: 69*37*35 *Carton Qty: 40/Pair

Projector LED Headlight

Model	PICTURE	Drawing	Series/Size	Watt	LED Chips	Available Buckle	Specifications	G.W/ CTN CTN/ Size CM
ALO-R-3-L17			3" Fan	55W /60W	Trinity Automotive 3570	★High Beam ★Low Beam	1. Operating Voltage:DC12-24V 2. Color Temperature:6000-7000K 3. Material: Aluminum 4. Aluminum Heatsink 5. Lifespan: 50000h 6. Work Temperature:-40°C~85°C . IP Rating: IP68	*Inner Box Weight:0.7KG *Inner Box Size: 22.6x16.2x10.8 *CTN Weight: 9.9KG *CTN size: 47.6x34x34.6 *Carton Qty: 12/Pair
ALO-R-3-L27-WS			3" Fan	42W /64W	Trinity Automotive 3570	★High Beam ★Low Beam Non-destructive Installation	1. Operating Voltage:DC 9-12V 2. Color Temperature:5800-6000K 3. Material: Aluminum 4. Aluminum Heatsink 5. Lifespan: 50000h 6. Work Temperature:-40°C~85°C	*Inner Box Weight:0.7KG *Inner Box Size: 22.6x16.2x10.8 *CTN Weight: 9.9KG *CTN size: 47.6x34x34.6 *Carton Qty: 12/Pair

LED Interior Bulb

Model	Picture	Watt	SMD Qty	Size (mm)	Input (A)	Current (V)	SPECS	QTY/CTN	G.W/ CTN CTN/ Size CM
(ALO-T105WS) White		1W	4 SMD	27*9.5	0.092A	12V DC	1. Led Chip: 2835 2.Constant current; no polarity	1000pcs	*Product Weight: 1.4g * CTN Weight:2 kg * CTN size: 24*17*17
ALO-T10(5W5)- Red/Blue/Amber		1W	4 SMD	27*9.5	0.092A	12V DC	1. Led Chip: 2835 2.Constant current; no polarity	1000pcs	*Product Weight: 1.4g * CTN Weight:2 kg * CTN size: 24*17*17
(ALO-IL-00001) T10		1.5W	6 SMD	11.84*25.91	0.124A	10-30V DC	1. Led Chip: 3030 2.Constant current; no polarity 3. Canbus	1000pcs	*Product Weight: 2.7g * CTN Weight:3 kg * CTN size: 24*17*17
(ALO-IL-00002) T10		1.6W	3 SMD	23.04*9.02	0.132A	12V DC	1. Led Chip: 3030 2. No polarity 3. Canbus	1000pcs	*Product Weight: 1.32g * CTN Weight:2 kg * CTN size: 24*17*17
(ALO-IL-00003) T10		0.6W	1 SMD	26.92*10	0.05A	12V DC	1. Led Chip: 3030	1000pcs	*Product Weight: 1.7g * CTN Weight:2 kg * CTN size: 24*17*17
(ALO-IL-00004) T10		0.8W	15 SMD	24.83*9.94	0.07A	12V DC	1. Led Chip: 4014 2. No polarity	1000pcs	*Product Weight: 1.4g * CTN Weight:1.5 kg * CTN size: 24*17*17
(ALO-IL-00009) T10		3W	10 SMD	32.25*9.94	0.252A	10-30V DC	1. Led Chip: 2835 2.Constant current; no polarity; Canbus	1000pcs	*Product Weight: 2.4g * CTN Weight:3 kg * CTN size: 24*17*17
(ALO-IL-00012) T10/BA9S		1.6W	19 SMD	27.47*12	0.14	12-18V DC	1. Led Chip: T10-18+1-3014+3030 2.Constant current; no polarity 3. Canbus	1000pcs	*Product Weight:2.8g * CTN Weight:3 kg * CTN size: 24*17*17
(ALO-IL-00013) T10/BA9S		0.96W	2 SMD	25.7*10	0.08A	12V DC	1. Led Chip: 3030 2.Constant current; no polarity	1000pcs	*Product Weight: 1.4g * CTN Weight:2 kg * CTN size: 24*17*17
(ALO-IL-00014) T10/BA9S		0.6W	1 SMD	25.9*9.97	0.05A	12V DC	1. Led Chip: 3030 2. No polarity	1000pcs	*Product Weight: 1.8g * CTN Weight:2 kg * CTN size: 24*17*17
(ALO-IL-00017) T15		15.48W	28 SMD	41.03*15.18	1.29A	10-30V DC	1. Led Chip: 3030 2.Constant current; no polarity 3. Canbus 4. with Lens	1000pcs	* CTN Weight:8.4 kg * CTN size: 24*17*17
(ALO-IL-00021) 1156(BA15S, BA15US) 1157(BA15D, BAY15D) 3156, 3157, 7440, 7443 H4,H7,H8,H9,H10,H11,H13,5202,9 004,9005,9006,9007,P13W,PY24W,PSX2 4W,PSX26W		4.5W	24 SMD	51.94*19.98	0.38A	10-30V DC	1. Led Chip: 3020 2.Constant current; no polarity	1000pcs	*Product Weight: 18.5g * CTN Weight:18 kg * CTN size: 24*17*17
(ALO-IL-00022) 1156(BA15S, BA15US) 1157(BA15D, BAY15D) 3156, 3157, 7440, 7443 H4,H7,H8,H9,H10,H11,H13,5202,9004,9 005,9006,9007,P13W,PY24W,PSX24W,P SX26W		4.7W	21 SMD	19.9*62.5	0.392A	10-30V DC	1. Led Chip: 3030 2.Constant current; no polarity	1000pcs	*Product Weight: 18.3g * CTN Weight:18 kg * CTN size: 24*17*17

Model	Picture	Watt	SMD Qty	Size (mm)	Input (A)	Current (V)	SPECS	QTY/CTN	G.W/ CTN CTN/ Size CM
(ALO-IL-00030) 1156(BA15S, BA15US) 1157(BA15D, BAY15D) 3156, 3157, 7440, 7443 H4,H7,H8,H9,H10,H11,H13,5202,9004,9005,9006,9007,P13W,PY24W,PSX24W,P SX26W		3.8W	57 SMD	47*22	0.319A	10-30V DC	1. Led Chip: 3014 2.Constant current; no polarity	1000pcs	*Product Weight: 8.41g * CTN Weight:9 kg * CTN size: 24*17*17
(ALO-IL-00031) Festoon31MM		1.7W	12 SMD	31*9	0.14A	12V DC	1. Led Chip: 4014 2.Constant current; no polarity 3. Canbus	1000pcs	*Product Weight: 2.9g * CTN Weight:3 kg * CTN size: 24*17*17
(ALO-IL-00032) Festoon36MM		1.6W	16 SMD	36*9	0.136A	12V DC		1000pcs	
(ALO-IL-00033) Festoon39MM		1.6W	16 SMD	39*9	0.136A	12V DC		1000pcs	
(ALO-IL-00034) Festoon41MM		1.8W	20 SMD	42*9	0.143A	12V DC		1000pcs	
(ALO-IL-00039) Festoon31MM		1.6W	6 SMD	31*8.8	0.132A	12V DC	1. Led Chip: 2835 2. No polarity; Canbus	1000pcs	*Product Weight: 2.7g * CTN Weight:3 kg * CTN size: 24*17*17
(ALO-IL-00040) Festoon36MM		1.8W	8 SMD	36*8.8	0.147A	12V DC		1000pcs	
(ALO-IL-00041) Festoon39MM		1.9W	10 SMD	39*8.8	0.154A	12V DC		1000pcs	
(ALO-IL-00042) Festoon41MM		2W	10 SMD	41*8.8	0.168A	12V DC		1000pcs	
(ALO-IL-00051) Festoon31MM		2W	21 SMD	31*13*10	0.168A	12V DC	1. Led Chip: 3014 2.Constant current; no polarity 3.Canbus	1000pcs	*Product Weight: 4.5g * CTN Weight:5 kg * CTN size: 24*17*17
(ALO-IL-00052) Festoon36MM		2.1W	27 SMD	36*13*10	0.174A	12V DC		1000pcs	
(ALO-IL-00053) Festoon39MM		2.4W	30 SMD	39*13*10	0.190A	12V DC		1000pcs	
(ALO-IL-00054) Festoon41MM		2.8W	33 SMD	41*13*10	0.22A	12V DC		1000pcs	